

Deluxe Telescopic "T" Type Stabilizing Jack

Deluxe Telescopic Stabilizing Jack



	MODEL TYPE
Model 22630	20 - 8 - Tel
Model 24830	20 - 8 - Tel
Model 30930	20 - 8 - Tel

Sets of 2 with crank handle model 20032

Deluxe "T" Type Stabilizing Jack



	MODEL TYPE	SETS OF
Model 22356	20 - 13 - T	4
Model 22652	20 - 8 - T	2
Model 22655	20 - 8 - T	4

Sets of 2 and 4 with crank handle model 20032

Deluxe Hex Head Crank Handle

Model 20032



- Chrome speed wrench crank handle.
- Forged socket head for long life.
- Spin handle grips for ease of operation.

Deluxe Base Pads


Model 20033 set of 2

Model 20031 set of 4



- 7-1/4" diameter pad provides a firm footing on loose ground.
- Easy to install, all hardware supplied.
- Rubber sleeve prevents rattle during travel.

HOW TO SELECT A STABILIZING JACK

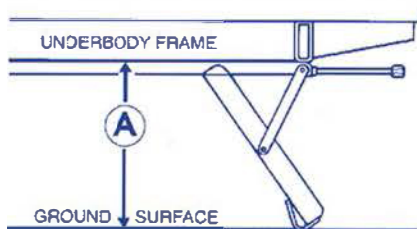

FIRST: Review the diagram (above) and measure your underbody frame to ground, as illustrated. Write it down. Knowing your (A) dimension, refer to the selection chart (right) and choose the model that fits the measurement.



Deluxe Telescopic and "T" Type Stabilizing Jacks

BAL Stabilizing Jacks are designed for fine leveling and stabilizing travel trailers and 5th wheel trailers. The two basic types are Telescopic and "T". The Telescopic Type is the most popular because it requires no existing trailer frame crossmember for installation. The unit will telescope to fit any underbody frame width. The "T" Type Stabilizing Jacks require an existing trailer frame crossmember and are mounted individually.

U.S. Patent No. 5,205,586
Canadian Patent No. 1,315,770



BENEFITS AND FEATURES

- 2000 lbs. static load per individual jack.
- Easy to install, either bolts or welds to trailer frame.
- Works equally well hitched or unhitched.
- Durable tool quality speed wrench for easy operation.
- Refrigerator operates more efficiently.
- High strength steel construction.
- Rust inhibitive coatings and plating for long life and trouble free performance.

DIMENSION	LEG LENGTH	MODEL NUMBERS	
		TELESCOPIC	"T" TYPE
UP TO 16"	20"	22630	22356 (set of 4) 22652 (set of 2) 22655 (set of 4)
16" TO 20"	24"	24830	N/A
OVER 20"	30"	30930	N/A

