

Which solar charge controller: PWM or MPPT?

20 January 2020

1. Introduction

PWM and MPPT charge controllers are both widely used to charge batteries with solar power.

The PWM controller is in essence a switch that connects a solar array to the battery. The result is that the voltage of the array will be pulled down to near that of the battery.

The MPPT controller is more sophisticated (and more expensive): it will adjust its input voltage to harvest the maximum power from the solar array and then transform this power to supply the varying voltage requirement of the battery plus load. Thus, it essentially decouples the array and battery voltages so that there can be, for example, a 12V battery on one side of the MPPT charge controller and panels wired in series to produce 36V on the other.

It is generally accepted that MPPT will outperform PWM in a cold to temperate climate, while both controllers will show approximately the same performance in a subtropical to tropical climate.

In this paper the effect of temperature is analyzed in detail, and a quantitative performance comparison of both controller topologies is given.

2. The current-voltage curve and the power-voltage curve of a solar panel

The examples throughout the following pages are based on an average 100 W / 36 cell monocrystalline solar panel, with the following specifications:

100 W panel 36 cells

P_m	100 W	Temp. coeff. of P_m	γ	-0.45 %/°C
V_m	18 V	Temp. coeff. Of V_m	ϵ	-0.47 %/°C
I_m	5.56 A	Temp. coeff. Of I_m	δ	0.02 %/°C
V_{oc}	21.6 V	Temp. coeff. Of V_{oc}	β	-0.35 %/°C
I_{sc}	6.12 A	Temp. coeff. Of I_{sc}	α	0.05 %/°C

Table 1: Specifications of the solar panel as used in the examples below

The current-voltage curve of this panel is shown in figure 1

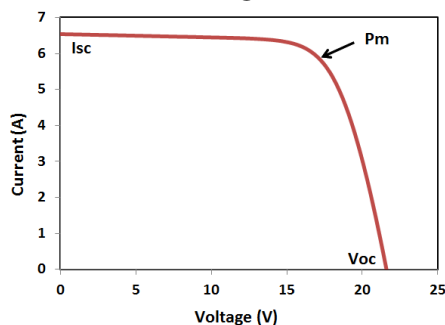


Fig 1: Current-voltage curve of a 100W / 36 cell solar panel
Standard Test Conditions (STC): cell temperature: 25°C, irradiance: 1000 W/m², AM: 1.5

From this basic curve the power-voltage curve can be derived by plotting $P = V \times I$ against V .
The result is the blue curve in figure 2 below.

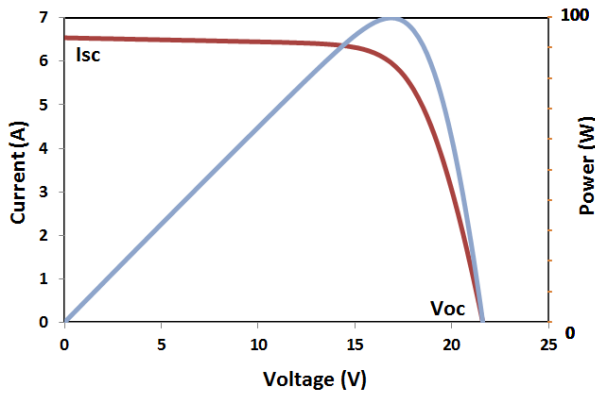


Fig 2: Current-voltage curve (brown) and power-voltage curve (blue, $P = V \times I$)

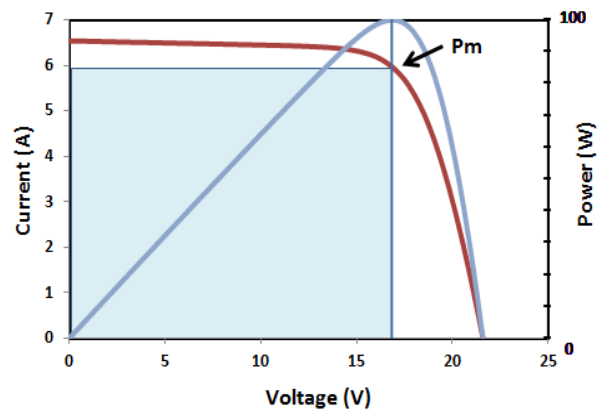


Fig. 3: The area of the blue rectangle is proportional to the product $P_m = V_m \times I_m$

Obviously, the power obtained from the panel is zero when it is short circuited ($0 \times I_{sc} = 0$) or when no current is drawn from the panel ($V_{oc} \times 0 = 0$).

In between those two zero power points the product $P = V \times I$ reaches a maximum: the Maximum Power Point ($P_m = V_m \times I_m$).

The importance of the Maximum Power Point can be visualized as follows:

The product $V_m \times I_m$ is proportional to the area of the rectangle shown in figure 3. P_m is reached when the area of this rectangle is at its largest. Figure 4 and 5 show two less optimal results obtained when power is harvested at a voltage which is too low or too high.

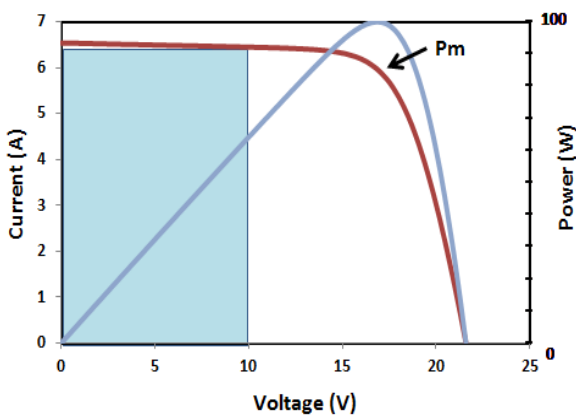


Fig 4: Less power harvested:
voltage is too low

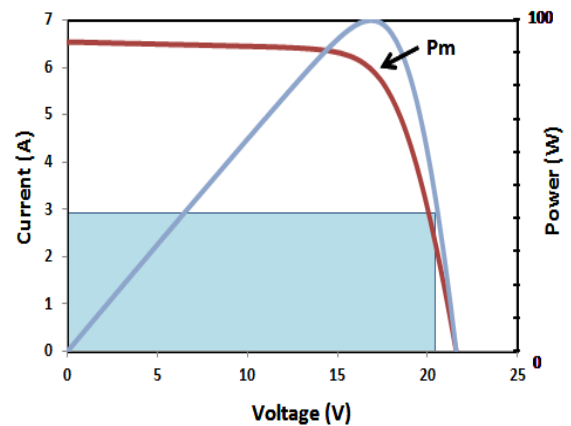


Fig 5: Less power harvested:
voltage is too high

The maximum output of a 100 W solar panel is, by definition, 100 W at STC (cell temperature: 25°C, irradiance: 1000 W/m², AM: 1.5).

As can be seen from figure 3, in the case of a 100 W / 36 cell crystalline panel the voltage corresponding to the Maximum Power Point is $V_m = 18$ V and the current is $I_m = 5.56$ A. Therefore $18 \text{ V} \times 5.56 \text{ A} = 100 \text{ W}$.

Conclusion:

In order to get the maximum out of a solar panel, a charge controller should be able to choose the optimum current-voltage point on the current-voltage curve: the Maximum Power Point.

An MPPT controller does exactly that.

The input voltage of a PWM controller is, in principle, equal to the voltage of the battery connected to its output (plus voltage losses in the cabling and controller). The solar panel, therefore, is not used at its Maximum Power Point, in most cases.

3. The MPPT charge controller

As shown in figure 6, the voltage V_m corresponding to the Maximum Power Point can be found by drawing a vertical line through the top of the power-voltage curve, and the current I_m can be found by drawing a horizontal line through the intersection of the V_m line and the current-voltage curve. These values should be equal to the values specified in table 1.

In this example $P_m = 100\text{ W}$, $V_m = 18\text{ V}$ and $I_m = 5.56\text{ A}$.

With its microprocessor and sophisticated software, the MPPT controller will detect the Maximum Power Point P_m and, in our example, set the output voltage of the solar panel at $V_m = 18\text{ V}$ and draw $I_m = 5.56\text{ A}$ from the panel.

What happens next?

The MPPT charge controller is a DC to DC transformer that can transform power from a higher voltage to power at a lower voltage. The amount of power does not change (except for a small loss in the transformation process). Therefore, if the output voltage is lower than the input voltage, the output current will be higher than the input current, so that the product $P = V \times I$ remains constant.

When charging a battery at $V_{bat} = 13\text{ V}$, the output current will therefore be

$$I_{bat} = 100\text{ W} / 13\text{ V} = 7.7\text{ A}.$$

(Similarly, an AC transformer may supply a load of 4.4 A at 23 VAC ($4.4 \times 23 = 100\text{ W}$) and therefore draw 0.44 A from the 230 V mains ($230 \times 0.44 = 100\text{ W}$)).

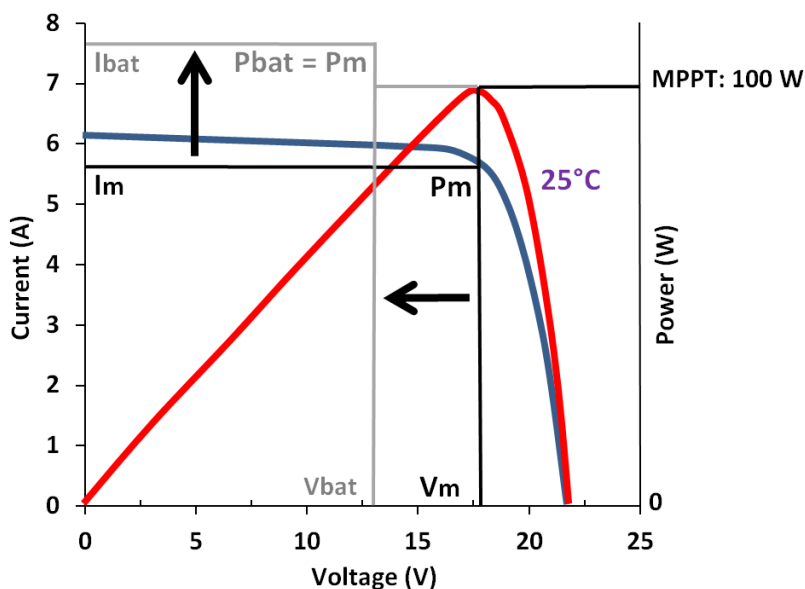


Fig 6: MPPT controller, graphical representation of the DC to DC transformation

$$P_m = V_m \times I_m = 18\text{ V} \times 5.6\text{ A} = 100\text{ W}, \text{ and}$$

$$P_{bat} = V_{bat} \times I_{bat} = 13\text{ V} \times 7.7\text{ A} = 100\text{ W}$$

4. The PWM charge controller

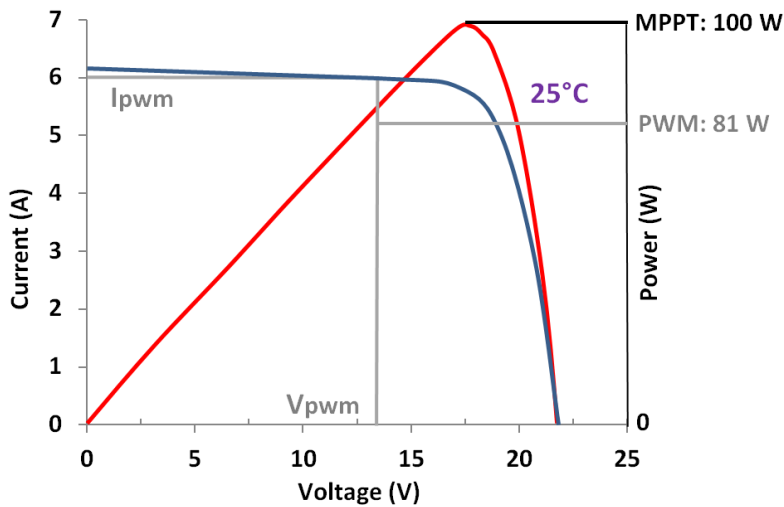


Fig 7: PWM charge controller

In this case the charge voltage imposed on the solar panel can be found by drawing a vertical line at the voltage point equal to V_{bat} plus 0.5 V. The additional 0.5 V represents the voltage loss in the cabling and controller. The intersection of this line with the current-voltage curve gives the current $I_{pwm} = I_{bat}$.

A PWM controller is not a DC to DC transformer. The PWM controller is a switch which connects the solar panel to the battery. When the switch is closed, the panel and the battery will be at nearly the same voltage. Assuming a discharged battery the initial charge voltage will be around 13 V, and assuming a voltage loss of 0.5 V over the cabling plus controller, the panel will be at $V_{pwm} = 13.5$ V. The voltage will slowly increase with increasing state of charge of the battery. When absorption voltage is reached the PWM controller will start to disconnect and reconnect the panel to prevent overcharge (hence the name: Pulse Width Modulated controller).

Figure 7 shows that in our example, with $V_{bat} = 13$ V and $V_{pwm} = V_{bat} + 0.5$ V = 13.5 V, the power harvested from the panel is $V_{pwm} \times I_{pwm} = 13.5$ V \times 6 A = 81 W, which is 19% less than the 100 W harvested with the MPPT controller.

Clearly, at 25°C a MPPT controller is preferable to a PWM controller.

Temperature, however, does have a strong effect on the output voltage of the solar panel. This effect is discussed in the next section.

5. The effect of temperature

5.1 The effect of temperature is much too large to neglect

When a panel heats up due to the sun shining on it, both the open circuit voltage and the Maximum Power Point voltage become lower. The current however remains practically constant. In other words: the current-voltage curve moves to the left with increasing temperature, as shown in figure 8.

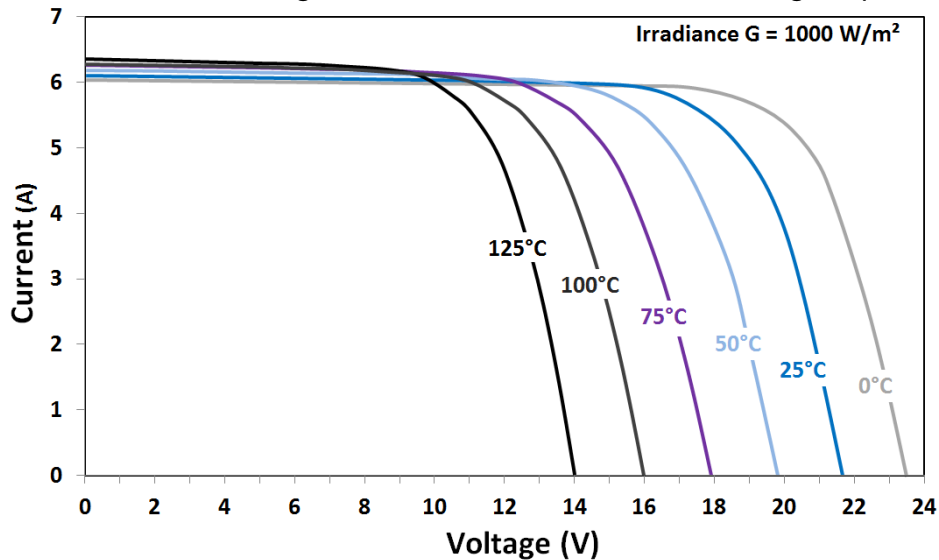


Fig 8: The current-voltage curve moves to the left with increasing temperature

Obviously, as shown in figure 9 below, the Maximum Power Point also moves to the left, and downwards because the product $V_m \times I_m$ decreases with increasing temperature.

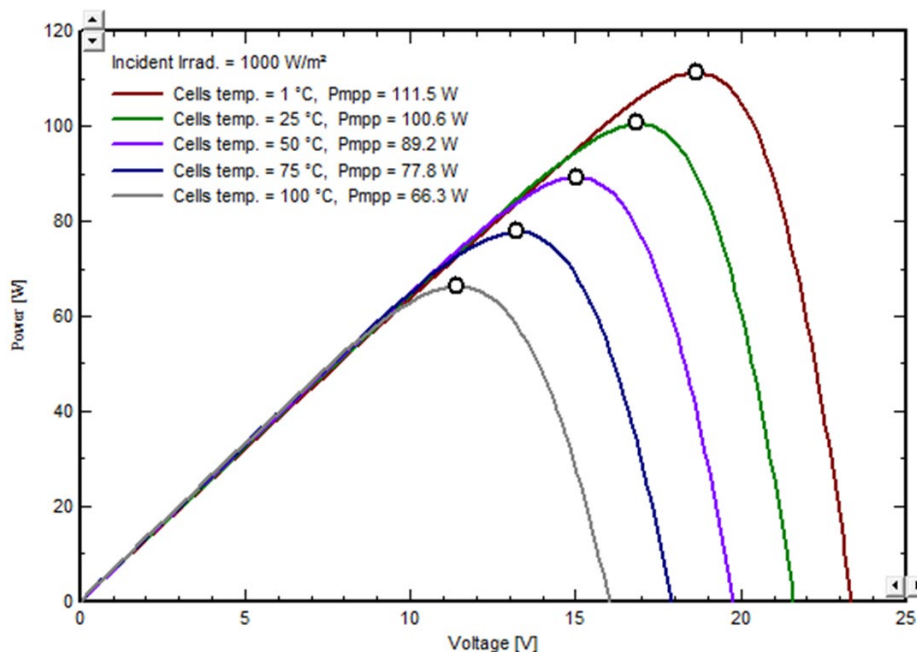


Fig 9: The Maximum Power Point moves to the left and downwards with increasing temperature

5.2. The MPPT controller when cell temperature is 75°C

MPPT power, current and voltage can be derived as follows from the specification of the solar panel:

$$P_m(75^\circ\text{C}) = P_m(25^\circ\text{C}) \times (1 + (75^\circ\text{C} - 25^\circ\text{C}) \times \gamma) = 100 \times (1 + (50 \times -0.45 / 100)) = 77.5 \text{ W}$$

And, following the same method:

$$I_m(75^\circ\text{C}) = 5.6 \text{ A}$$

$$V_m(75^\circ\text{C}) = 13.8 \text{ V}$$

And a check: $I_m(75^\circ\text{C}) \times V_m(75^\circ\text{C}) = 5.6 \times 13.8 = 77.3 \text{ W}$. This is a difference of 0.2 W compared to the $P_m(75^\circ\text{C})$, as calculated earlier, so this is close enough and correlates.

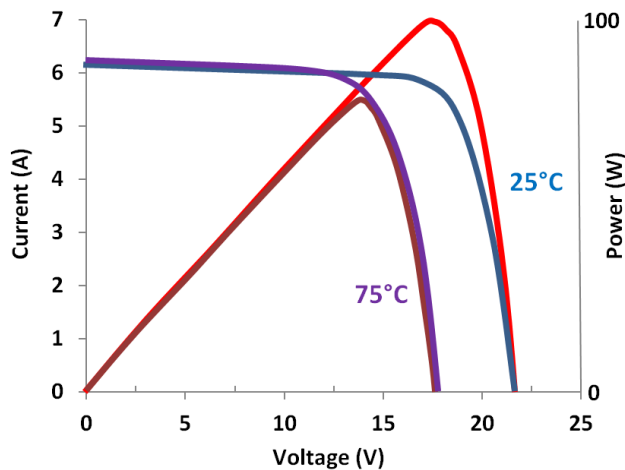


Fig 10: Current-voltage and power-voltage curves at 25°C and 75°C

Note:

Most panel manufacturers do not specify the temperature coefficients of I_m (δ) and V_m (ϵ), and if they do, ϵ is often given a value which is far too low. The result is that calculating V_m with the help of its temperature coefficient gives an incorrect value (which is far too optimistic in most cases) and $I_m \times V_m$ will also be wrong, i.e. $I_m \times V_m \neq P_m$ which is mathematically impossible.

5.3 The PWM controller when cell temperature is 75°C

Still assuming a battery voltage of 13 V, the voltage imposed on the panel will be 13.5 V. With the help of figure 11 the PWM current can be found by drawing the vertical voltage line and the horizontal current line. The resulting PWM current is 5.95 A and solar panel output is $13.5 \text{ V} \times 5.7 \text{ A} = 77 \text{ W}$.

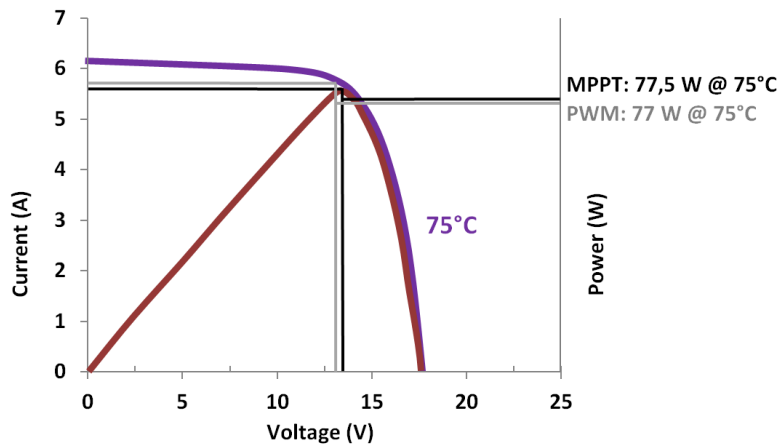


Fig 11: Comparison of MPPT and PWM performance at 75°C panel temperature

Black lines: MPPT (77.5 W).

Grey lines: PWM (77 W). MPPT performance advantage: nil

Conclusion: at $T_{\text{cell}} = 75^\circ\text{C}$ and $V_{\text{bat}} = 13 \text{ V}$ the difference in performance between the two controllers is negligible.

5.4 Cell temperature 100°C

It is interesting to see what happens at even higher temperatures.

Figure 12 shows what happens at 100°C.

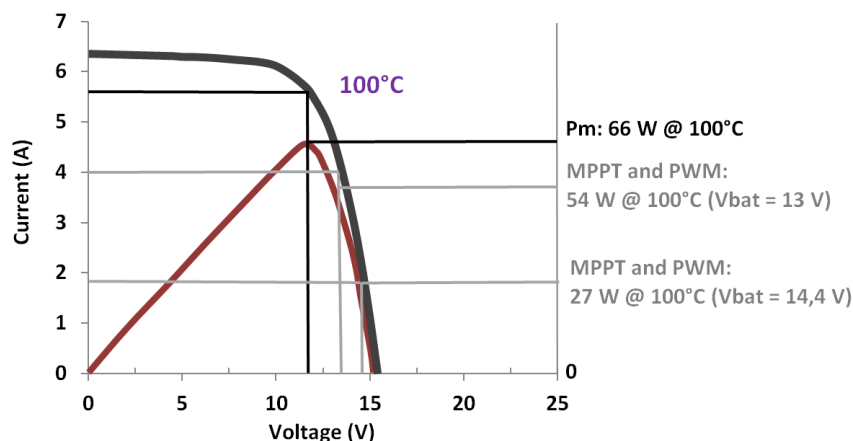


Fig 12: At 100°C panel temperature the Maximum Power Point voltage is 11.7 V

Most MPPT controllers cannot transform a lower voltage to a higher voltage, as that's not what they are made for. If the MPPT voltage V_m becomes lower than V_{bat} , they will therefore operate like a PWM controller, connecting the panel directly to the battery.

As shown in figure 11: if $V_{\text{bat}} = 13 \text{ V}$, the current harvested from the panel will be limited to 4 A.

And the situation becomes worse with increasing battery voltage (or increasing temperature): the charge current quickly reduces to only a few amps.

However, if the MPPT controller could in this situation still operate at the Maximum Power Point, it could harvest 66 W, whether V_{bat} is low or high!

6. The solution

Clearly, in our example, both MPPT and PWM controllers do not perform at high cell temperatures.

The solution to improve MPPT controller performance at high cell temperatures is to increase panel voltage by increasing number of cells in series.

Obviously, this solution is not applicable to PWM controllers: increasing the number of cells in series will reduce performance at low temperature.

In case of the MPPT controller: replace the 12 V / 100 W panel by a 24 V / 100 W panel or by two 12 V / 50 W panels in series. This will double the output voltage and the MPPT controller will charge a 12 V battery with 66 W (5.1 A @ 13 V), at 100°C cell temperature, see figure 13.

An additional advantage: because the panel voltage has doubled, the panel current is reduced by half ($P = V \times I$ and P has not changed but V has doubled).

Ohm's law tells us that losses due to cable resistance are $P_c \text{ (Watt)} = R_c \times I^2$, where R_c is the resistance of the cable. **What this formula shows is that for a given cable loss, cable cross sectional area can be reduced by a factor of four when doubling the array voltage.**

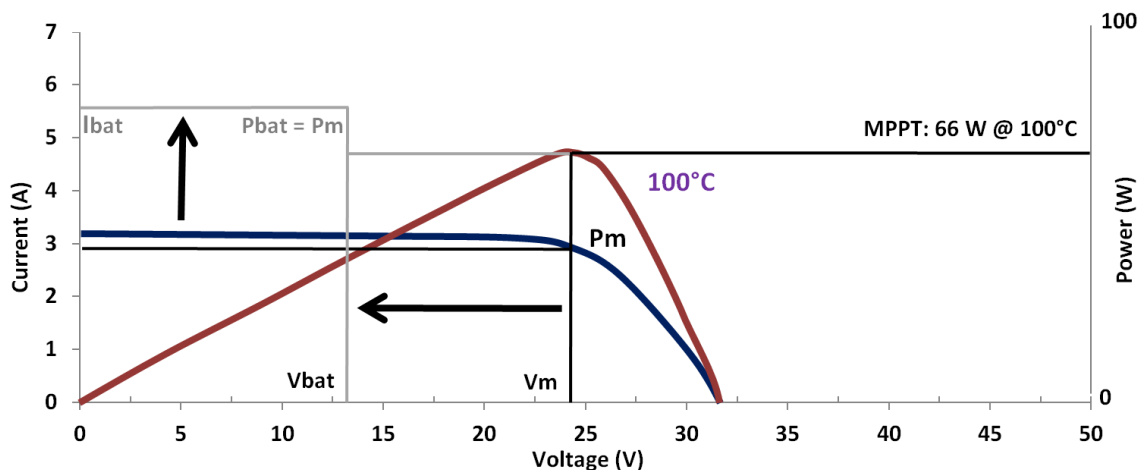


Fig 13: Two 12 V / 50 W panels in series instead of one 12 V / 100 W panel

$$P_m = V_m \times I_m = 23.4 \text{ V} \times 2.8 \text{ A} = 66 \text{ W and}$$

$$P_{bat} = V_{bat} \times I_{bat} = 13 \text{ V} \times 5.1 \text{ A} = 66 \text{ W}$$

Conclusion:

When using an MPPT charge controller there are two compelling reasons to increase the PV voltage (by increasing the number of cells in series):

- Harvest as much power as possible from the solar array, even at high cell temperature.
- Decrease cable cross sectional area and therefore decrease cost.

7. Relative performance graphs

7.1 Relative performance as a function of temperature

Let us now assume that the MPPT controller is connected to a solar array with sufficient cells in series to achieve an MPPT voltage several volts higher than the highest battery voltage.

For example:

12 V battery: 72 cells (a 24 V array) or more

24 V battery: 108 cells (a 36 V array) or more

48 V battery: 216 cells (a 72 V array) or more

The PWM controller is connected to a solar array of exactly the same W_p power, with the usual number of cells in series and used to charge a 12 V, 24 V or 48 V battery: respectively 36, 72 or 144 cells.

The relative performance of the two controllers as a function of cell temperature can be compared as shown in figure 14.

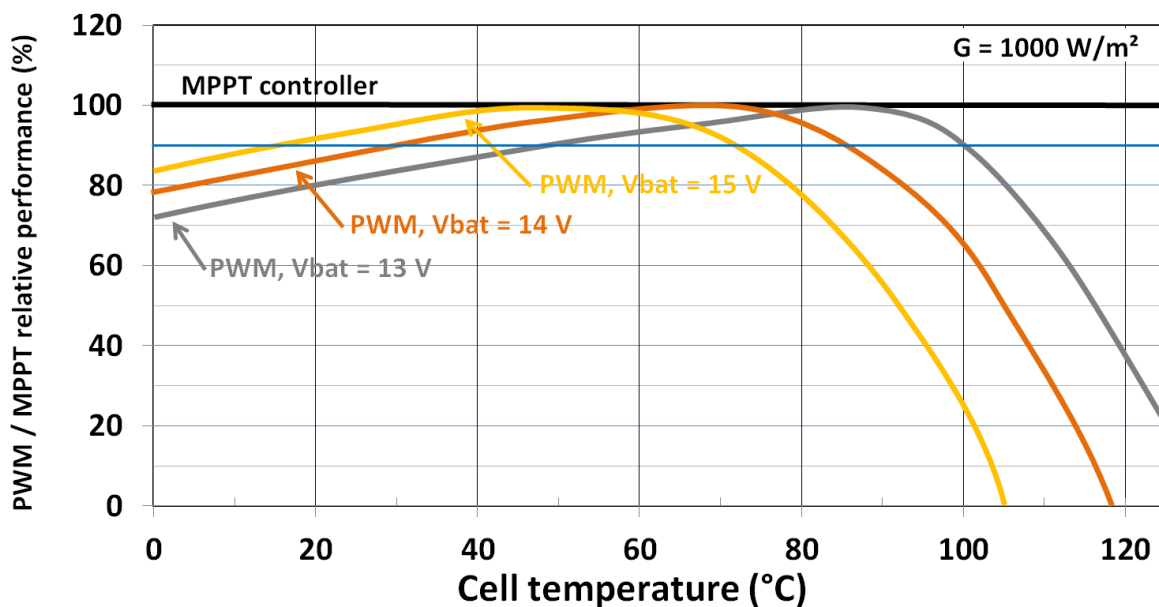


Fig 14: Relative PWM / MPPT performance comparison as a function of cell temperature and battery voltage under STC and assuming 0.5 V loss in the cabling plus controller.

The performance of the MPPT controller is set at 100%. PWM performance will match MPPT performance (100% relative performance) when the battery voltage plus losses in the cabling and the controller happens to be equal to the MPPT voltage. Three PWM relative performance curves are shown, based on three different battery voltages, and, as expected, the 100% point is achieved at lower temperatures when the battery voltage increases.

7.2 Absolute performance as a function of temperature

Including temperature dependence of P_m results in figure 15 below.

The performance of the MPPT controller is set at 100% at 25°C using STC.

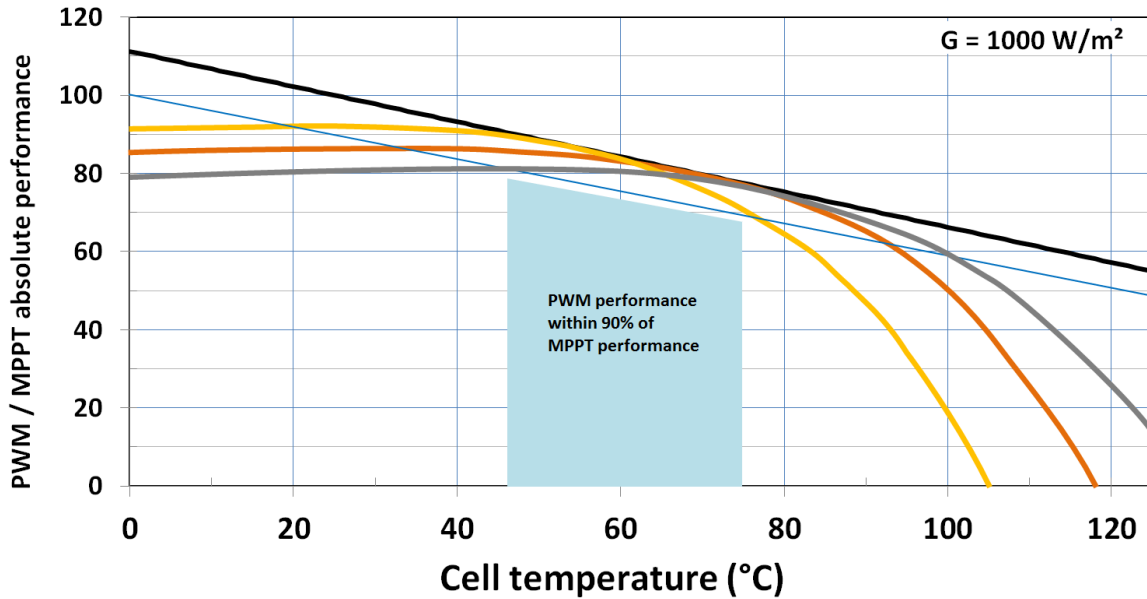


Fig 15: Absolute PWM / MPPT performance comparison as a function of cell temperature and battery voltage under STC and assuming a 0.5 V loss in the cabling plus controller.

The blue area shows that a PWM controller performs nearly as well (within 10%) as an MPPT controller over a relatively wide battery charge voltage (13 V to 15 V) and temperature range (45°C and 75°C).

The 10% limit is given by the thin blue line in figure 14 and 15.

Before drawing any conclusions a few other solar cell and system parameters have to be considered.

7.3 The influence of irradiance

The output of a solar panel is approximately proportional to irradiance, but V_m remains nearly constant as long as irradiance exceeds 200 W / m². Irradiance therefore does not materially influence the MPPT / PWM performance ratio as long as irradiance exceeds 200 W / m² (see figure 16).

But at low irradiance (overcast sky, wintertime) V_m drops rapidly and an MPPT controller connected to an array with a much higher nominal voltage than the battery, will perform far better than a PWM controller.

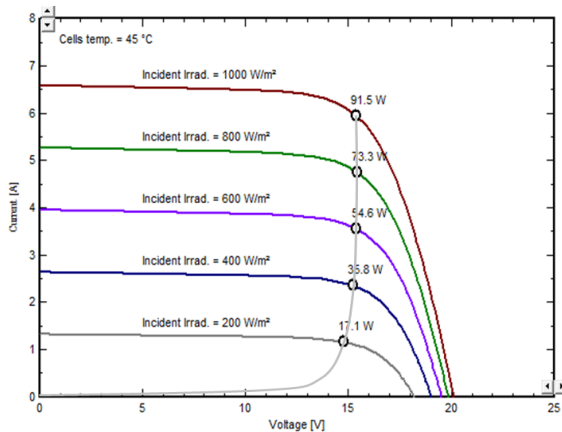


Figure 16: Dependence of M_p and V_{mp} on irradiance

7.4 Monocrystalline or Polycrystalline

According to manufacturer's datasheets V_m is, on average, slightly lower in the case of polycrystalline panels. In the case of a 12 V panel the difference is 0.35 V to 0.7 V and the temperature coefficient is similar for both technologies. The consequence is that the PWM curves in figure 13 and 14 move 5 to 10°C toward the left in the case of a polycrystalline panel.

7.5 Partial shading

Partial shading lowers the output voltage. MPPT therefore has a clear advantage over PWM in the case of partial shading.

7.6 Losses in cabling and the controller

In a good installation these losses are small compared to the effect of temperature. Note that throughout this paper, power, voltage and current are taken at the panel output and do not take any losses into account, unless stated otherwise.

7.6 Cell temperature

The next question to answer is: what is the temperature of the solar cells in practice.

A first indication is given by the NOCT (Normal Operating Cell Temperature) which nowadays is specified by most solar panel manufacturers.

NOCT conditions are defined as follows:

- Ambient temperature: 20°C
- Irradiance: 800 W/m²
- Air Mass: 1.5
- Wind speed: 1 m/s
- Mounting: open back side (free standing array)
- No electrical load: no power is drawn from the panel

According to manufacturer's data, on average NOCT = 45°C. This means that under the conditions as stated, solar cell temperature is 25°C higher than ambient temperature.

A more general formula to calculate cell temperature T_c is:

$$T_c = T_a + G/U \quad \text{or} \quad \Delta T = T_c - T_a = G/U$$

With

T_a : ambient temperature

G : irradiance (W/m²)

U : thermal loss factor (W/m²·ΔT)

And a simple model for the thermal loss factor is:

$$U = U_c + U_v \cdot W_v$$

Where U_c is a constant component and U_v a factor proportional to wind speed W_v (m/s) at the array.

The resulting thermal formula is:

$$T_c = T_a + G/(U_c + U_v \cdot W_v) \quad \text{or} \quad \Delta T = T_c - T_a = G/(U_c + U_v \cdot W_v)$$

Extrapolating from and some other websites, the approximate values for U_c and U_v are:

Freestanding arrays:

$$U_c \approx 20 \text{ W / m}^2 \cdot \Delta T$$

$$U_v \approx 12 \text{ W / m}^2 \cdot \Delta T / \text{m/s}$$

Arrays with the back side fully insulated:

$$U_c \approx 10 \text{ W / m}^2 \cdot \Delta T$$

$$U_v \approx 6 \text{ W / m}^2 \cdot \Delta T / \text{m/s}$$

Figure 17 shows the resulting cell temperature increase with respect to ambient temperature for free standing arrays and for arrays with the back side fully insulated.

Clearly, air flow is extremely important.

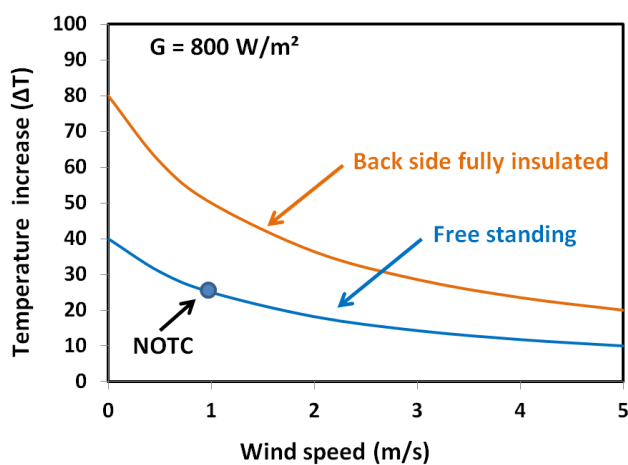


Fig 17: Wind speed and temperature increase

Free standing array

Without wind, the temperature increase of 40°C of a free standing array can result in cell temperatures of 70 to 80°C on a hot sunny day in Europe. Under such conditions PWM performance lags MPPT performance by 10%.

Back side fully insulated

In an array with a fully insulated back side the cell temperature can routinely exceed 100°C. Fully charging the battery with a PWM controller then becomes impossible because charge current will be very low or even zero before the absorption voltage is reached.

In most installations the back side of an array is not fully insulated. When mounted on a sloped roof for example, normally care has been taken to allow for some air flow between the roof and the back side of the solar panels.

The heat capacity of air, however, is very low. The flowing air under the panels may quickly attain equilibrium with the temperature of the panels, leading to no heat exchange at all except for the first few decimeters of the air duct. Therefore, for most of the array, the back side-U value may be the fully insulated U-value.

8. General conclusion

Temperature

A standard crystalline solar panel with a nominal voltage of 12 V consists of 36 cells in series. At 25°C cell temperature, the output current of this panel will be nearly constant up to about 17 V. Above this voltage, current drops off rapidly, resulting in maximum power being produced at around 18 V.

Unfortunately the voltage point at which the current starts to drop off decreases with increasing temperature. Below that voltage point the current however remains practically constant, and is not influenced by temperature.

The output power and output voltage both decrease by about 4.5% for every 10°C of temperature increase.

PWM controller

When a solar array is connected to the battery through a PWM charge controller, its voltage will be pulled down to near that of the battery. This leads to a suboptimal power output wattage (Watt = Amp x Volt) at low and at very high solar cell temperatures.

In times of rainy or heavily clouded days or during heavy intermittent loads a situation may occur where the battery voltage becomes lower than is normal. This would further pull down the panel voltage; thus degrading the output even further.

At very high cell temperatures the voltage drop off point may decrease below the voltage needed to fully charge the battery.

As array area increases linearly with power, cabling cross sectional area and cable length therefore both increase with power, resulting in substantial cable costs, in the case of arrays exceeding a few 100 Watts.

The PWM charge controller is therefore a good low cost solution for small systems only, when cell temperature is moderate to high (between 45°C and 75°C).

MPPT controller

Besides performing the function of a basic controller, an MPPT controller also includes a DC to DC voltage converter, converting the voltage of the array to that required by the batteries, with very little loss of power.

An MPPT controller attempts to harvest power from the array near its Maximum Power Point, whilst supplying the varying voltage requirements of the battery plus load. Thus, it essentially decouples the array and battery voltages, so that there can be a 12 volt battery on one side of the MPPT charge controller and two 12 V ($V_{max} = 18$ V) panels wired in series to produce 36 V on the other.

If connected to a PV array with a substantially higher nominal voltage than the battery voltage, an MPPT controller will therefore provide charge current even at very high cell temperatures or in low irradiance conditions when a PWM controller would not help much.

As array size increases, both cabling cross sectional area and cable length will increase. The option to wire more panels in series and thereby decrease current, is a compelling reason to install an MPPT controller as soon as the array power exceeds a few hundred Watts (12 V battery), or several hundred Watts (24 V or 48 V battery).

An MPPT charge controller is therefore the solution of choice:

- a) If cell temperature will frequently be low (below 45°C) or very high (more than 75°C).*
- b) If cabling cost can be reduced substantially by increasing array voltage.*
- c) If system output at low irradiance is important.*
- d) If partial shading is a concern.*

BlueSolar PWM Charge Controller-LCD&USB 12/24V & 48V

Liquid crystal display

For status monitoring and set-up

Load output

Over-discharge of the battery can be prevented by connecting all loads to the load output. The load output will disconnect the load when the battery has been discharged to a pre-set voltage.

Some loads (especially inverters) can best be connected directly to the battery, and the inverter remote control connected to the load output. A special interface cable may be needed, please see the manual. The connect and disconnect voltages are adjustable.

Day/night timing of the load output

This option allows for a pre-set ON-time after dusk.

Programmable battery charge algorithm


Preprogrammed algorithms for AGM, GEL, Flooded or LiFePO4 batteries (with internal BMS only)

Two 5 Volt USB outputs

Maximum current (both outputs combined): 2A



**BlueSolar Charge Controllers
LCD&USB 12/24-5/10/20**

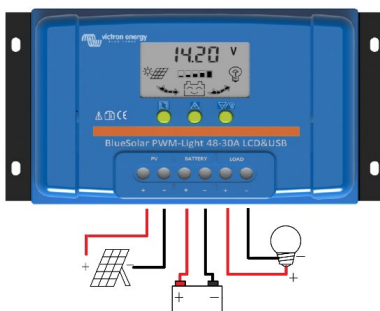

**BlueSolar Charge Controllers
LCD&USB 12/24-30 & 48-10/20/30**

BlueSolar PWM Charge Controller	12/24-5	12/24-10	12/24-20	12/24-30	48-10	48-20	48-30
Battery Voltage	12/24 V with automatic system voltage detection				48V		
Rated charge current	5A	10A	20A	30A	10A	20A	30A
Automatic load disconnect	Yes						
Maximum solar voltage	28V / 55V (1)				100V (1)		
Self-consumption	< 10 mA						
Load output	Manual control + low voltage disconnect +timer						
Protection	Battery reverse polarity (fuse)		Output short circuit		Over temperature		
Overload protection	Shut down after 60 s in case of 130% load						
	Shut down after 5 s in case of 160% load						
	Short circuit: immediate shut down						
Grounding	Common positive						
Operating temp. range	-35 to +60°C (full load)						
Humidity (non-condensing)	Max 95%						
BATTERY							
Charge voltage 'absorption'	Factory setting: 14,4V / 28,8V				Factory setting: 57,6V		
Charge voltage 'float' (2)	Factory setting: 13,7V / 27,4V				Factory setting: 54,8V		
Low voltage load disconnect	Factory setting: 11,2V / 22,4V				Factory setting: 44,8V		
Low voltage load reconnect	Factory setting: 12,6V / 25,2V				Factory setting: 50,4V		
USB							
Voltage	5V						
Current	2A (total from 2 outputs)						
ENCLOSURE							
Protection class	IP20						
Terminal size	6 mm ² / AWG10				16mm ² / AWG6		
Weight	0,15kg				0,3kg		
Dimensions (h x w x d)	96 x 169 x 36 mm (3.8 x 6.7 x 1.4 inch)				101x184x47mm (4.0 x 7.4 x 1.8 inch)		
STANDARDS							
Safety	EN60335-1, IEC 62109-1						
EMC	EN 61000-6-1, EN 61000-6-3, ISO 7637-2						
1) For 12V use 36 cell solar panels For 24V use 72 cell solar panels or 2x 36 cell in series For 48V use 2x 72 cell solar panels or 4x 36 cell in series				2) The controller switches to the lower float voltage level 2 hours after the absorption voltage has been reached. Whenever the battery voltage becomes lower than 13V, a new charge cycle is triggered.			

BlueSolar PWM-DUO Charge Controller

12/24V 20A




BlueSolar PWM-DUO 12/24-20

Features

- PWM controller
- Charges two separate batteries. For example the starter battery and the service battery of a boat or mobile home
- Programmable charge current ratio (standard setting: equal current to both batteries)
- Charge voltage settings for three battery types (Gel, AGM and Flooded)
- Internal temperature sensor and optional remote temperature sensor
- Protected against over current
- Protected against short circuit
- Protected against reverse polarity connection of the solar panels and/or battery



Remote display for BlueSolar DUO 12/24-20

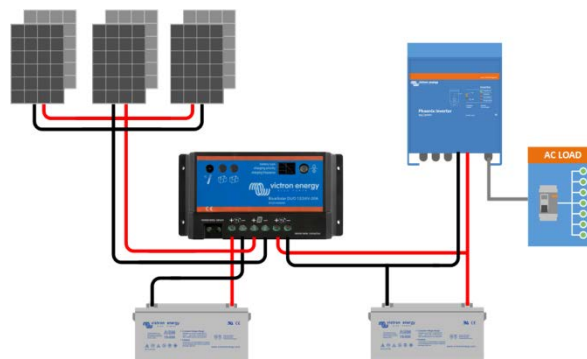

BlueSolar PWM-DUO	12/24-20		
Battery Voltage	12/24 V with automatic system voltage detection		
Rated charge current	20A		
Second battery output	Yes		
Automatic load disconnect	n. a.		
Maximum solar voltage	28V / 55V (1)		
Self-consumption	4 mA		
Protection	Battery reverse polarity (fuse)	Output short circuit	Over temperature
Operating temp. range	-35 to +55°C (full load)		
Humidity (non-condensing)	Max 95%		
DEFAULT SETTINGS			
Charge voltage 'absorption' (2)	14.4V / 28,8V		
Charge voltage 'float' (2)	13.7V / 27,4V		
Battery temperature sensor	Yes, internal sensor (remote sensor optional)		
Temperature compensation	-30mV/°C / -60mV/°C		
ENCLOSURE			
Protection class	IP20		
Terminal size	6 mm ² / AWG10		
Weight	0,18kg		
Dimensions (h x w x d)	76 x 153 x 37 mm		
STANDARDS			
Safety	IEC 62109-1		
EMC	EN 61000-6-1, EN 61000-6-3, ISO 7637-2		
1) For 12V use 36 cell solar panels For 24V use 72 cell solar panel or 2x 36 cell in series		2) See manual for alternative voltage settings	

BlueSolar PWM-Light Charge Controllers 12/24V



BlueSolar PWM-Light 10A

Features

- Load output with low battery voltage disconnect function.
- Lighting control function, one timer only.
- Two digit seven segment display for quick and easy setting of the load output functionality, including timer setting.
- Three stage battery charging (bulk, absorption, float), not programmable.
- Load output protected against over load and short circuit.
- Protected against reverse polarity connection of the solar array and/or battery.

Day/night timing options

See manual for details

BlueSolar PWM-Light	12/24-5	12/24-10	12/24-20	12/24-30
Battery Voltage	12/24 V with automatic system voltage detection			
Rated charge current	5A	10A	20A	30A
Automatic load disconnect	Yes			
Maximum solar voltage	28V / 55V (1)			
Self-consumption	< 10 mA			
Load output	Manual control + low voltage disconnect			
Protection	Battery reverse polarity (fuse)	Output short circuit	Over temperature	
Overload protection	Shut down after 60 s in case of 130% load			
	Shut down after 5 s in case of 160% load			
	Short circuit: immediate shut down			
Grounding	Common positive			
Operating temp. range	-20 to +50°C (full load)			
Humidity (non-condensing)	Max 95%			
BATTERY				
Charge voltage 'absorption'	14,2V / 28,4V			
Charge voltage 'float'	13,8V / 27,6V			
Low voltage load disconnect	11,2V / 22,4V			
Low voltage load reconnect	12,6V / 25,2V (manual)			
	13,1V / 26,2V (automatic)			
ENCLOSURE				
Protection class	IP20			
Terminal size	5 mm ² / AWG10			
Weight	0,15kg			0,2kg
Dimensions (h x w x d)	70 x 133 x 33,5 mm (2.8 x 5.3 x 1.3 inch)			
STANDARDS				
Safety	IEC 62109-1			
EMC	EN 61000-6-1, EN 61000-6-3, ISO 7637-2			
1) For 12V use 36 cell solar panels For 24V use 72 cell solar panels or 2x 36 cell in series			2) The controller switches to the lower float voltage level 2 hours after the absorption voltage has been reached. Whenever the battery voltage becomes lower than 13V, a new charge cycle is triggered.	

BlueSolar PWM-Light 48V Charge Controllers



BlueSolar PWM-Light 48-30

Features

- Load output with low battery voltage disconnect function.
- Lighting control function, one timer only.
- Seven segment display for quick and easy setting of the load output functionality, including timer setting.
- Three stage battery charging (bulk, absorption, float), not programmable.
- Load output protected against over load and short circuit.
- Protected against reverse polarity connection of the solar array and/or battery.

Day/night timing options

See manual for details

BlueSolar PWM-Light	48-10	48-20	48-30
Battery Voltage		48V	
Rated charge current	10A	20A	30A
Automatic load disconnect		Yes	
Maximum solar voltage		100 V	
Self-consumption		< 10 mA	
Load output		Manual control + low voltage disconnect	
Protection	Battery reverse polarity (fuse)	Output short circuit	Over temperature
Overload protection		Shut down after 60 s in case of 130% load	
		Shut down after 5 s in case of 160% load	
		Short circuit: immediate shut down	
Grounding		Common positive	
Operating temp. range		-20 to +50°C (full load)	
Humidity (non-condensing)		Max 95%	
BATTERY			
Bulk charge		58,0V (1)	
Charge voltage 'absorption'		56,8V	
Charge voltage 'float'		55,2V	
Low voltage load disconnect		44,8V	
Low voltage load reconnect		50,4V (manual) 52,4V (automatic)	
ENCLOSURE			
Protection class		IP20	
Terminal size		6 mm ² / AWG10	
Weight		0,17 kg	
Dimensions (h x w x d)		95 x 140 x 33,5 mm	
STANDARDS			
Safety		IEC 62109-1	
EMC		EN 61000-6-1, EN 61000-6-3	

- 1) The Controller immediately switches to the lower absorption voltage level after the bulk charge level has been reached.

BlueSolar PWM-Pro Charge Controllers



BlueSolar PWM-Pro 10A



BlueSolar Pro Remote Panel

Programmable

The BlueSolar PWM-Pro series is ready for use with its default settings.

It also is fully programmable:


- With help of a computer and software (available free of charge from our website)
- With the dedicated BlueSolar Pro Remote Panel (see features below).

Features

- Lighting control function, fully programmable.
- Three stage battery charging (bulk, absorption, float), fully programmable.
- Integrated battery monitor function (Remote Panel needed to display state of charge).
- Load output with low voltage disconnect and manual control (default setting).
- Optional external temperature sensor.
- Load output protected against over load and short circuit.
- Protected against reverse polarity connection of the solar array and/or battery.

Day/night timing options

See Remote Panel manual for details

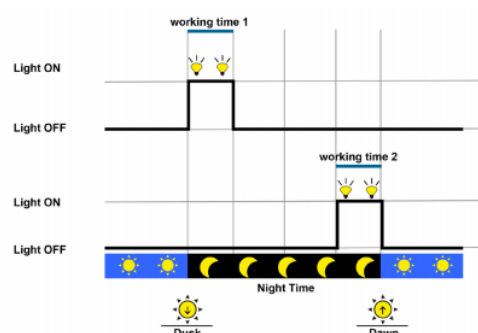

BlueSolar PWM-Pro	12/24-5	12/24-10	12/24-20	12/24-30
Battery Voltage	12/24V with automatic system voltage detection			
Rated charge current	5A	10A	20A	30A
Automatic load disconnect	Yes			
Maximum solar voltage	28V / 55V (1)			
Self-consumption	< 10mA			
Load output	Manual control + low voltage disconnect			
Protection	Battery reverse polarity (fuse)	Output short circuit	Over temperature	
Battery temperature sensor	Optional (article SCC940100100)			
Temperature compensation	-30 mV / °C resp. -60 mV / °C (if temperature sensor installed)			
Remote panel	Optional (article SCC900300000)			
Grounding	Common positive			
Operating temp. range	-20 to +50°C			
Humidity (non-condensing)	Max 98%			
DEFAULT SETTINGS				
Absorption charge (2)	14,4V / 28,8V			
Float charge (2)	13,8V / 27,6V			
Equalization charge (2)	14,6V / 29,2V			
Low voltage load disconnect	11,1V / 22,2V			
Low voltage load reconnect	12,6V / 25,2V			
ENCLOSURE				
Terminal size	4mm ²	4mm ²	10mm ²	10mm ²
Protection category	IP30			
Weight	0,13kg	0,13kg	0,3kg	0,5kg
Dimensions (h x w x d)	138x70x37 mm 5.4x2.7x1.4 inch	138x70x37 mm 5.4x2.7x1.4 inch	160x82x48 mm 6.3x3.2x1.9 inch	200x100x57 mm 7.9x4.0x2.3 inch
STANDARDS				
Safety	IEC 62109-1			
Emission	EN 61000-6-1, EN 61000-6-3, ISO 7637-2			
1) For 12V use 36 cell Solar panels For 24V use 72 cell Solar panels				