


MODELS 502 & 503 SIDE DISCHARGE FANS

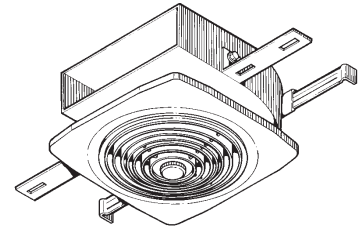

Efficient, high-performance ventilation for a variety of wall or ceiling installations.

FEATURES

GRILLE:

- Contemporary styled grille complements modern decor
- White polymeric grilles can be painted to match any decor

MOTOR:

- Motor assembly offers fast, easy "twist-lock" installation
- Permanently lubricated, thermally protected, plug-in motor
- Specially designed fan blade stays in balance - will not distort

HOUSING:

- Installs easily in walls or ceiling
- Galvanized steel housing, 25 gage
- Built-in backdraft damper
- Fits 3¼" x 10" duct
- Adjustable mounting brackets span from 14" to 24"

SPECIFICATIONS

| MODEL | VOLTS | AMPS | RPM | SONES | CFM | DUCT |
|-------|-------|------|------|-------|-----|-----------|
| 502 | 120 | 1.7 | 1560 | 9.0 | 300 | 3¼" x 10" |
| 503 | 120 | 1.5 | 1725 | 5.0 | 160 | 3¼" x 10" |



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



TYPICAL SPECIFICATION


Ventilator shall be Broan Model 502 (Model 503).

Ventilator shall have compact galvanized steel housing.


Motor assembly shall be removable and permanently lubricated. RPM shall not exceed 1560 (Model 502), 1725 (Model 503).

Air delivery shall be no less than 300 CFM and sound levels no greater than 9.0 Sones (Model 502), (160 CFM and 5.0 Sones – Model 503). All air and sound ratings shall be certified by HVI. Units shall be U.L. Listed.


MODEL 502
HOUSING

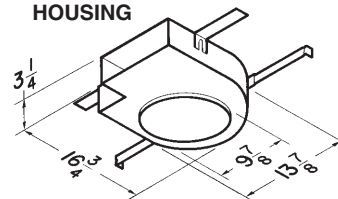

MODEL 503
HOUSING



MODEL 502
GRILLE



MODEL
503
GRILLE

