

Included



Clamps

M8 eyelets

Optional



Fused clamps

Fused M6 or M8 eyelets

Extension cable 2m

Autoplug

Battery indicator panel

Battery indicator eyelet M8

Carry Case for Blue Smart IP65 Chargers and accessories

Wall mount

Rubber Bumper

Blue Smart IP65 Charger 120V	12V 4/5/7/10/15A	24V 5/8A
Input voltage	120 VAC	
Efficiency	94%	95%
Standby power consumption	0.5W	
Minimum battery voltage	Starts charging from down to 0V	
Charge voltage 'absorption'	Normal: 14.4V High: 14.7V Li-ion: 14.2V	Normal: 28,8V High: 29,4V Li-ion: 28,4V
Charge voltage 'float'	Normal: 13.8V High: 13.8V Li-ion: 13.5V	Normal: 27,6V High: 27,6V Li-ion: 27,0V
Charge voltage 'storage'	Normal: 13.2V High: 13.2V Li-ion: 13.5V	Normal: 26,4V High: 26,4V Li-ion: 27,0V
Charge current	4 / 5 / 7 / 10 / 15A	5/8A
Charge current in low current mode	2 / 2 / 2 / 3 / 4A	2 / 3A
Temperature compensation (lead-acid batteries only)	16 mV/°C (9mV/°F)	32 mV/°C (18mV/°F)
Can be used as power supply	Yes	
Back current drain	0.7Ah/month (1mA)	
Protection	Reverse polarity Output short circuit Over temperature	
Operating temp. range	-30 to +50°C (full rated output up to 30°C) 0 to + 140°F (full rated output up to 90°F)	
Humidity (non condensing)	Max 95%	
ENCLOSURE		
Battery-connection	Black and red cable of 1.5 meter (4.9 feet)	
120 V AC-connection	Cable of 1.8 meter (5.9 feet) with US NEMA 1-15 plug	
Protection category	IP65 (splash and dust proof, and ignition protected)	
Weight	0.9kg (2lbs)	0,9kg (2lbs)
Dimensions (h x w x d)	12/7: 47x95x190mm 1.8x3.7x7.5 inches	24/8: 60x105x190mm 2.3x4.1x7.5 inches
	Other: 60x105x190mm	
STANDARDS		
Safety	UL 1236, CSA C22.2, EN 60335-1, 60335-2-29	
Emission	EN 55014-1, EN 61000-6-3, EN 61000-3-2	
Immunity	EN 55014-2, EN 61000-6-1, EN 61000-6-2, EN 61000-3-3	

Energy. Anytime. Anywhere.



Blue Smart Charger

IP65 The professional's choice



- Water, dust and chemical resistant
- Seven step smart charge algorithm
- Recovery of fully discharged 'dead' batteries
- Automatic power supply function
- Severe cold performance: down to -30°C
- Several other battery life enhancing features
- Low power mode to charge smaller batteries
- **Li-ion** battery mode
- Setup and configure, readout of voltage and current by **Bluetooth Smart**




Ultra high efficiency "green" battery charger

With up to 95% efficiency, these chargers generate up to four times less heat when compared to the industry standard. And once the battery is fully charged, power consumption reduces to 0,5 Watt, some five to ten times better than the industry standard.

Durable, safe and silent

- Low thermal stress on the electronic components.
- Protection against ingress of dust, water and chemicals.
- Protection against overheating: the output current will reduce as temperature increases up to 60°C, but the charger will not fail.
- The chargers are totally silent: no cooling fan or any other moving parts.

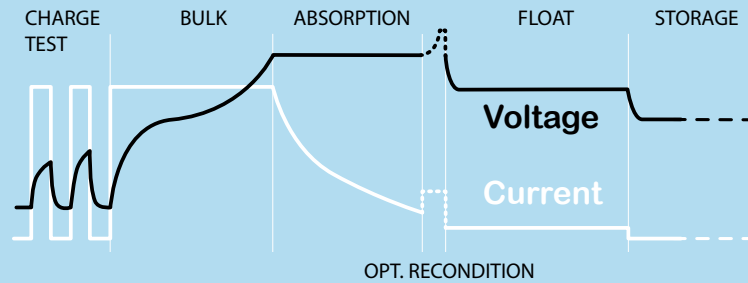

Reconditioning

A lead-acid battery that has been insufficiently charged or has been left discharged during days or weeks will deteriorate due to sulfation. If caught in time, sulfation can sometimes be partially reversed by charging the battery with low current up to a higher voltage.


Recovery function for fully discharged batteries

Most reverse polarity protected chargers will not recognize, and therefore not recharge a battery which has been discharged to zero or nearly zero Volts. The **Blue Smart IP65 Charger** however will attempt to recharge a fully discharged battery with low current and resume normal charging once sufficient voltage has developed across the battery terminals.

The VictronConnect app

Setup, readout and configure your **Blue Smart IP65 Charger** via your smartphone.

You can display the status of your charger and battery and even control the functions of your charger using the VictronConnect app. On your screen the readout of voltage and current is default available.

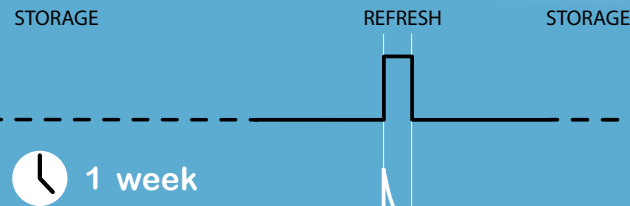

Storage mode: less corrosion of the positive plates

Even the lower float charge voltage that follows the absorption period will cause grid corrosion. It is therefore essential to reduce the charge voltage even further when the battery remains connected to the charger during more than 48 hours.

Temperature compensated charging

The optimal charge voltage of a lead-acid battery varies inversely with temperature. The **Blue Smart IP65 Charger** measures ambient temperature during the test phase and compensates for temperature during the charge process. The temperature is measured again when the charger is in low current mode during float or storage. Special settings for a cold or hot environment are therefore not needed.

Li-ion battery mode

The **Blue Smart IP65 Charger** uses a specific charging algorithm for Li-ion (LiFePO₄) batteries, with automatic Li-ion under voltage protection reset.



IP65 - Charger Guide

Blue Smart IP65 Charger

Battery size Ah Your IP65 Charger »	7 A 20 - 70 Ah		12/7		12V 10 A 30 - 100 Ah		12/10		15 A 50 - 150 Ah		12/15		24V 8 A 30 - 80 Ah		24/8	
	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN
	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK


Recommended

This is the best charger for this type of battery. The battery will be charged in the most efficient way.

OK

This charger can be used for this battery. It is possible that it takes longer to charge the battery than using a recommended charger.

Included

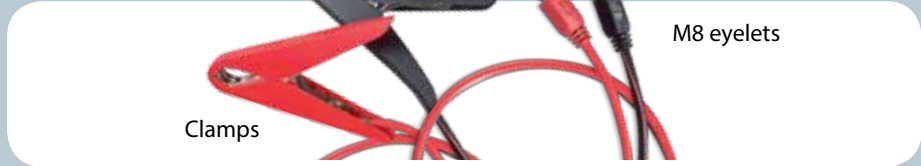

Clamps

M8 eyelets

Optional



Fused clamps

Fused M6 or M8 eyelets

Extension cable 2m

Autoplug

MagCode Power Clip 12V



Battery indicator panel



Battery indicator eyelet M8

Carry Case for Blue Smart IP65 Chargers and accessories



Wall mount

Rubber Bumper



Blue Smart IP65 Charger	12 V 4/5/7/10/15/25 A	24 V 5/8/13 A
Input voltage	230 VAC	
Efficiency	94%	95%
Standby power consumption	0,5 W	
Charge voltage 'absorption'	Normal: 14,4 V High: 14,7 V Li-ion: 14,2 V	Normal: 28,8 V High: 29,4 V Li-ion: 28,4 V
Charge voltage 'float'	Normal: 13,8 V High: 13,8 V Li-ion: 13,5 V	Normal: 27,6 V High: 27,6 V Li-ion: 27,0 V
Charge voltage 'storage'	Normal: 13,2 V High: 13,2 V Li-ion: 13,5 V	Normal: 26,4 V High: 26,4 V Li-ion: 27,0 V
Charge current	4 / 5 / 7 / 10 / 15 / 25 A	5 / 8 / 13 A
Low current mode	2 / 2 / 2 / 3 / 4 / 10 A	2 / 3 / 4 A
Temperature compensation (lead-acid batteries only)	16 mV/°C	32 mV/°C
Can be used as power supply	Yes	
Back current drain	0,7 Ah/month (1 mA)	
Protection	Reverse polarity Output short circuit Over temperature	
Operating temp. range	-30 to +50°C (full rated output up to 30°C) (cables retain flexibility at low temperature)	
Humidity (non-condensing)	Max 95%	
ENCLOSURE		
Battery-connection	Black and red cable of 1,5 meter	
230 V AC-connection	Cable of 1,5 meter with CEE 7/7, BS 1363 plug (UK) or AS/NZS 3112 plug	
Protection category	IP65 (splash and dust proof)	
Weight	IP65 12V 25A 24V 13A: 1,9kg Other: 0,9kg	
Dimensions (h x w x d)	IP65s 12V 4/5A : 45x81x182mm IP65 12V 7A 24V 5A: 47x95x190mm IP65 12V 10/15A 24V 8A: 60x105x190mm IP65 12V 25A 24V 13A: 75x140x240mm	
STANDARDS		
Safety	EN 60335-1, EN 60335-2-29	
Emission	EN 55014-1, EN 61000-6-3, EN 61000-3-2	
Immunity	EN 55014-2, EN 61000-6-1, EN 61000-6-2, EN 61000-3-3	



Energy. Anytime. Anywhere.

Blue Smart Charger

IP65 The professional's choice

5 YEAR WARRANTY



- Water, dust and chemical resistant
- Seven step smart charge algorithm
- Recovery of fully discharged 'dead' batteries
- Automatic power supply function
- Severe cold performance: down to -30°C
- Several other battery life enhancing features
- Low power mode to charge smaller batteries
- **Li-ion** battery mode
- Setup and configure, readout of voltage and current by **Bluetooth Smart**




Ultra high efficiency "green" battery charger

With up to 95% efficiency, these chargers generate up to four times less heat when compared to the industry standard. And once the battery is fully charged, power consumption reduces to 0,5 Watt, some five to ten times better than the industry standard.

Durable, safe and silent

- Low thermal stress on the electronic components.
- Protection against ingress of dust, water and chemicals.
- Protection against overheating: the output current will reduce as temperature increases up to 60°C, but the charger will not fail.
- The chargers are totally silent: no cooling fan or any other moving parts.

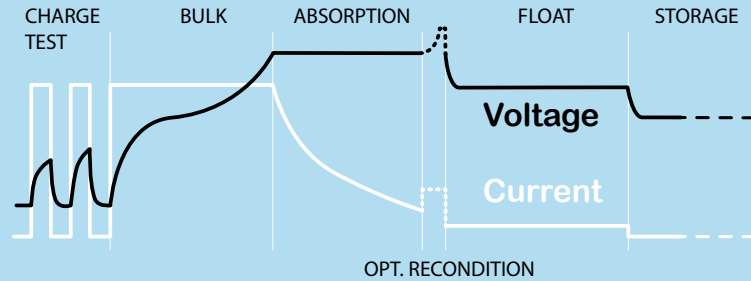

Reconditioning

A lead-acid battery that has been insufficiently charged or has been left discharged during days or weeks will deteriorate due to sulfation. If caught in time, sulfation can sometimes be partially reversed by charging the battery with low current up to a higher voltage.

Recovery function for fully discharged batteries

Most reverse polarity protected chargers will not recognize, and therefore not recharge a battery which has been discharged to zero or nearly zero Volts. The **Blue Smart IP65 Charger** however will attempt to recharge a fully discharged battery with low current and resume normal charging once sufficient voltage has developed across the battery terminals.

The VictronConnect app

Setup, readout and configure your **Blue Smart IP65 Charger** via your smartphone.

You can display the status of your charger and battery and even control the functions of your charger using the VictronConnect app. On your screen the readout of voltage and current is default available.

Download your app for iOS and Android here at <https://www.victronenergy.com/live/victronconnect:start>



STORAGE REFRESH STORAGE

1 week

Storage mode: less corrosion of the positive plates

Even the lower float charge voltage that follows the absorption period will cause grid corrosion. It is therefore essential to reduce the charge voltage even further when the battery remains connected to the charger during more than 48 hours.

Temperature compensated charging

The optimal charge voltage of a lead-acid battery varies inversely with temperature. The **Blue Smart IP65 Charger** measures ambient temperature during the test phase and compensates for temperature during the charge process. The temperature is measured again when the charger is in low current mode during float or storage. Special settings for a cold or hot environment are therefore not needed.

Li-ion battery mode

The **Blue Smart IP65 Charger** uses a specific charging algorithm for Li-ion (LiFePO₄) batteries, with automatic Li-ion under voltage protection reset.



IP65 - Charger Guide

Blue Smart IP65 Charger

Battery size Ah	12V				24V			
	4 & 5 A 20 - 50 Ah	7 A 20 - 70 Ah	10 A 30 - 100 Ah	15 A 50 - 150 Ah	25 A 80 - 250 Ah	5 A 20 - 50 Ah	8 A 30 - 80 Ah	13 A 50 - 130 Ah
Your IP65 Charger »	12/4 & 5	12/7	12/10	12/15	12/25	24/5	24/8	24/13
	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK
CLASSIC	OK	OK	OK	OK	OK	OK	OK	OK
MODERN	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK
	OK	OK	OK	OK	OK	OK	OK	OK

Recommended

This is the best charger for this type of battery. The battery will be charged in the most efficient way.

OK

This charger can be used for this battery. It is possible that it takes longer to charge the battery than using a recommended charger.

The battery is charged, smartly... to perfect condition

The seven-step charging algorithm gets the best out of your battery. The charger gives the battery the power it needs, maintains its health, ensures better performance... and a longer life.



Recovery of deeply-discharged 'dead' batteries

Unlike other brands, the Blue Smart IP65 Charger will attempt to recharge a deeply-discharged battery by force-feeding it with a low current. Normal charging will then be resumed as soon as there is sufficient voltage across the battery terminals.

Connect the battery with ease

The charger comes with both crocodile clips and M8 eyelets - making it easy to connect to the battery. If you wish, you can leave it permanently connected.



Check the status of your battery remotely

The Blue Smart IP65 is equipped with built-in Bluetooth, so the status of the charger and the battery can be checked on a smartphone, tablet or laptop. All settings of the charger can be configured with the VictronConnect app.

[Learn more about automotive tools we have.](#)