NuTone

DESCRIPTION

- Efficient ventilation and bright light in one easy installation.
- Fan and light operate separately or together.
- Quiet operation with one-piece molded blower wheel and silent backdraft damper.
- Attractive grille styling.
- Plug-in motor and light.
- Uses one (1) 100 watt incandescent bulb (bulb not included).
- Refer to NuTone's catalog for a complete listing of accessories to effectively adapt this Ventilation Fan with Light to your construction requirements.


DESIGN FEATURES

Air Delivery:	50 cfm.
Sound Level:	2.5 Sones.
Dimensions:	Housing: 8¼" x 8" x 5¾".
Dimensions.	
	Grille: 12" x 10¾".
Lamp:	One 100W maximum A19
	(bulb not included)
Material &	
Component Data:	Housing: Galvanized steel.
-	Grille: White polymeric.
	Lens: Translucent white polymeric.
	Reflector: Galvanized steel (white).
	Damper: Polymeric.
Motor:	Plug-in, permanently lubricated.
Electrical Rating:	With one (1) 100 watt bulb:
•	120 VAC, 60 Hz, 1.6 A
Blower Wheel:	One-piece polymeric,
2.0	4^{3} /" diameter.
Durat Cine	.,,
Duct Size:	4" diameter.
Mounting:	Mounting flange provided.
Model 763H:	Housing Pack
Model 763F:	Finish Pack





Model 763 Ventilation Fan with Light

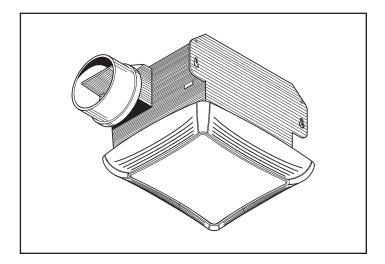

INSTALLATION

- Suitable for use over tub or shower enclosure when installed in a GFCI protected branch circuit.
- Installation instructions are included with each unit.
- Type IC for use with thermal insulation.
- Not for use with solid state speed controls.
- Not for use in kitchens.

ARCHITECT'S SPECIFICATIONS

Ventilation Fan with Light shall be NuTone Model 763 as manufactured according to listed specifications. Fan shall ventilate 50 cfm at a sound level of 2.5 Sones. Housing shall be $8\frac{1}{4}$ x 8 x $5\frac{3}{4}$ and connect to 4" duct.

PERFORMANCE RATINGS MODEL 763 FAN / LIGHT

HVI PERFORMANCE —

1.6

Model	Static Pressure (Ps)	CFM	Sones
763	0.10	50	2.5
703	0.25	29	



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

NEIOUT

AMPS -


Model


763

	WEIGHI	
Amps	Model	Sł


Model	Shipping Weight
763	6.0 lbs.





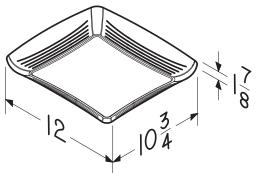

AIR FLOW PERFORMANCE

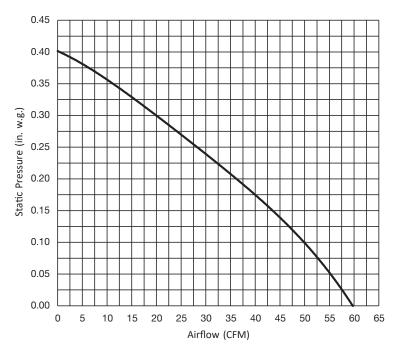

NuTone