




HEATER ACCESSORIES




Model 59V(Ivory), 59W(White) 60-Minute Time Control

- Operates continuously or for any set period up to 60 minutes
- Fits single-gang box
- 120V, 20 Amp or 240VAC, 10 Amp capacity
- For use with all Broan heaters and fans within Amp ratings




Model 63V(Ivory), 63W(White) 60-Minute Time Control with Rocker Switch

- Separate ON/OFF rocker switch
- Timer operates continuously or for any set period up to 60 minutes
- 120V, 20 Amp or 240VAC, 10 Amp capacity
- Fits two-gang box
- 120V, 20 Amp or 240VAC
- For use with all Broan heaters and fans within Amp ratings



Model 61V(Ivory), 61W(White) 15-Minute Time Control

- Operates for any set period up to 15 minutes (no "continuous on" position)
- Fits single-gang box
- 120V, 20 Amp or 240VAC, 10 Amp capacity
- For use with all Broan heaters and fans within Amp ratings





Model 68V(Ivory), 68W(White) Two-function Control

- Two, independent, 120 VAC, 15 Amp rocker switches (20 Amp total)
- Fits single-gang box
- For use with all Broan heaters and fans within Amp ratings

Model 83 Thermostat Kit (not shown)

- Snap-action, bimetallic
- 40°F to 125°F temperature range
- Includes knob and all mounting hardware to install a built-in thermostat into Broan Models 165F, 167F, 170F, 174F, and 178F

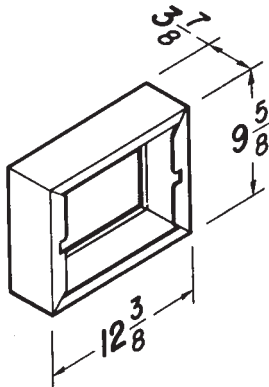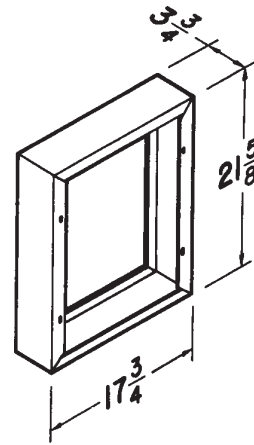


Model 84 Surface-Mounting Kit

- Heavy, 22-gauge steel
- White, baked enamel finish
- Includes all mounting hardware
- For use with Broan Models 170 thru 181

Model 85 Surface-Mounting Kit

- Heavy, 22-gauge steel
- White, baked enamel finish
- Includes all mounting hardware
- For use with Broan Vestibule Heaters - Models 192, 194 & 198

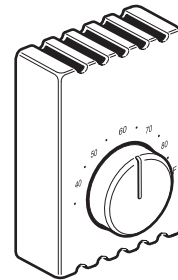

Model 87W Line-Voltage Thermostat

- 120 VAC / 240 VAC, 22A
- 277 VAC, 19A
- Snap-action, bimetal
- 40°F to 80°F temperature range
- Fits single-gang box
- For use with all Broan Heaters

Model 90 Thermostat Kit (not shown)

- Installs into Broan Model 114 Kickspace Heater
- Snap action, bi-metallic thermostat, knob and all mounting hardware included
- 120/240 VAC, 12.5 Amps
- 40°F to 130°F temperature range