



RDFU PREMIUM RADIATION DAMPER FOR VENTILATION FANS

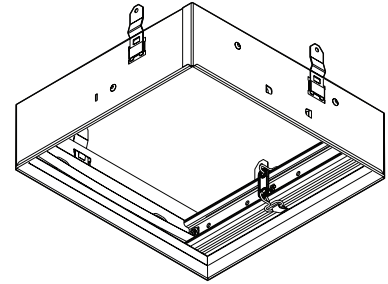

Premium radiation damper for use with Broan and NuTone ventilation fans (sold separately).

FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A
- UL Classified (UL-555C)

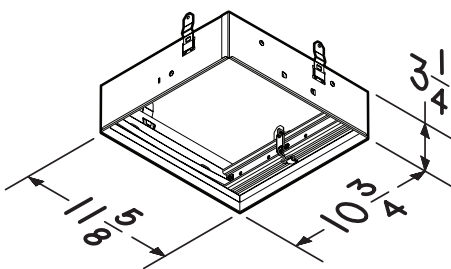

RDFU for use with the following ventilation fan models:

Broan QT130E, QT130LE*, QT140E, QT140LE*, QTXE150, QTXE150FLT*, RB80, RB110, RB80L*, RB80L1*, RB110L*, RB110L1*, XB50, XB80, XB110, XB50L*, XB80L*, XB110L*, XB110H*, XB110HL*, ZB80, ZB110, ZB80L*, ZB110L*, ZB110H*, ZB110HL*, ZB80M*, ZB110M*, ZB80ML*, ZB110ML*, XB50L1*, XB80L1*, XB110L1*, XB110HL1*, ZB80L1*, ZB80ML1*, ZB110L1*, ZB110HL1*, ZB110ML1*

NuTone QTN130E, QTN130LE1*, QTXEN150, QTXEN150FLT*, RN80, RN110, RN80L*, RN110L*, XN50, XN80, XN110, XN50L*, XN80L*, XN110L*, XN110H*, XN110HL*, ZN80, ZN110, ZN80L*, ZN110L*, ZN110H*, ZN110HL*, ZN80M*, ZN110M*, ZN80ML*, ZN110ML*

- * Sensor and light cable extensions required on these models.
- Purchase Model RDJUMPU separately for fans with incandescent or fluorescent lights
 - Purchase Model RDJUMPU1 separately for fans with LED lights

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C) and meets or exceeds NFPA-90A.



SEE DETAILS ON
UL CLASSIFICATION
MARKING ON PRODUCT