


# RDM2 RADIATION DAMPER FOR VENTILATION FANS

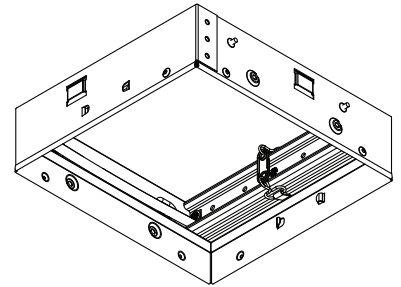

Radiation damper for use with Broan and NuTone ventilation fans (sold separately).

### FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Includes light jumper cable
- Meets or exceeds NFPA-90A
- UL Classified (UL-555C)

RDM2 for use with the following ventilation fan models:


**Broan** AE110-B, AE50110DC, AER110KC, AE110K, AE80K, A80-B, AE50-B, AE80-B, AE80B-B, A110-B, AE50110DCS, AE110S-B, AE80S-B, AE80BS, AE50110DCL, AE80BL-C, AE80L-C, AE110L-C, AE80LK, AE110LK, AE50110DCSL, AE80SL-C, AE110SL-C, A110L, A50L, A70L, A80L, AER110, AER110C, AER110K, AER110L, AER110LC, AER110LK, AER110S, AER50, AER50C, AER70C, AER80, AER80BC, AER80C, AER80K, AER80LK, AER90C, AER90LC, AEW110, AR110, AR110C, AR110LKVV, AR70LC, AR80C, AR80X, AR90C

**NuTone** AEN110-B, AN80C-B, AEN50-B, AEN80-B, AEN80B-B, AN110-B, AERN50110DCKC, AERN110K, AERN80K, AERN80KC, AEN80BS, AEN80BL-C, AEN80L-C, AEN110L-C, AERN80LK, AERN110DCSL, AERN110C, AERN110LC, AERN110S, AERN70C, AERN80BC, AERN90C, AERN90LC, AN110L, AN70L, AN80L, ARN110C, ARN110LKVV, ARN80C, ARN90C

### TYPICAL SPECIFICATION

Radiation damper shall be Broan/NuTone RDM2 suitable for use with the ventilation fan models listed in left column:

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C) and meets or exceeds NFPA-90A.

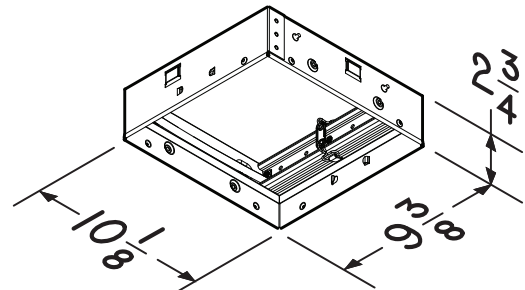

Dimensions shown are in inches.



SEE DETAILS ON  
UL CLASSIFICATION  
MARKING ON PRODUCT