



V830 BUILDER'S BEST® PIPE

DESCRIPTION

SAF-T-DUCT® Dryer Venting is the trusted solution for professional installers nationwide. These parts are available in several retail programs. It meets all clothes dryer manufacturer specifications. Heavy duty aluminum, Snap-Lock™ fittings, unique elbows and periscopes round out this line.



PRODUCT SPECIFICATIONS

- 5', 6', 8', and 12' lengths
- 4" diameter
- 8' length compressed to 24"
- Snap-Lock™ Fittings: One collar crimped (male), one collar slotted (female)
- Available with and without clamps




PART NUMBERS


Diameter	Length	Part #	Qty	Package
4"	6'	110129	12	Display Bag
	6'	010016	12	Display Tray
	5'	110138	15	Bulk
	6'	110107	12	Bulk
	8'	110120	20	Bulk
	12'	110079	20	Bulk
With two steel screw clamps:				
4"	6'	110092	12	Bulk

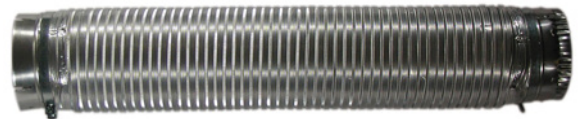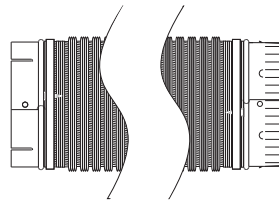

Builder's Best® Flexible pipe is designed to Snap-Lock™ to elbows (like the Close Elbow™ pictured) or to other pieces of V830 for longer runs

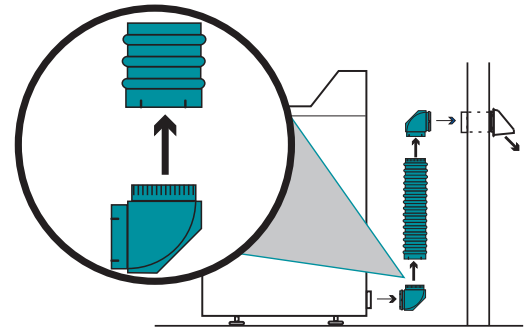

AIRFLOW

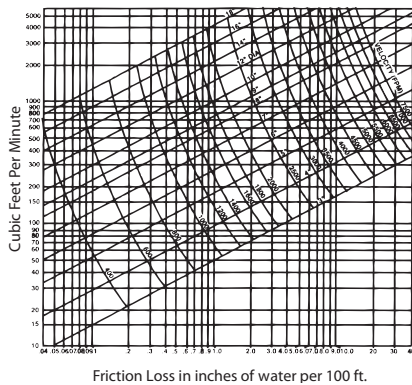

PERFORMANCE DATA

- Recommended Operating Pressure:
 - Positive: 6" WC max
 - Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

LABELS



PRO
Approved By
Dryer Manufacturers

