



V530 E-Z-FASTEN™



DESCRIPTION


- Non-insulated, non-combustible flexible aluminum air duct. Aluminum roll formed with crimp-locked seam.
- Designed for use as a dryer transition duct. One 4" aluminum Snap-Lock™ crimped fitting connects without clamps to other Snap-Lock™ fittings or to standard 4" connections. The soft-cuff end treatment eases installation.
- Class 0

PRODUCT SPECIFICATIONS


- 2', 5', and 8' lengths
- 4" diameter
- 8' length compressed to 24"
- One Snap-Lock™ crimped (male) fittings, one soft cuff end
- 2' Shortie includes 1 clamp and is helpful in short runs

PART NUMBERS

Diameter	Length	Part #	Qty	Package
4"	5'	110130	5	Display Bag
	5'	010150	15	Display Bag
	5'	110105	15	Bulk
	8'	110180	20	Bulk
E-Z-Fasten™ Shortie™ includes one steel screw clamp:				
4"	2'	110160	30	Bulk



AIRFLOW

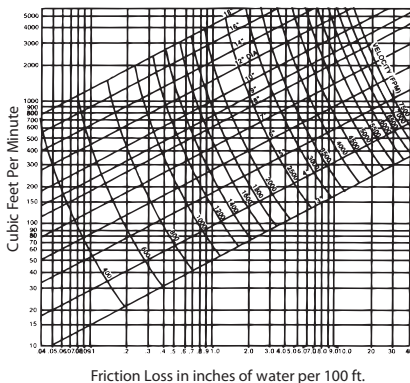

PERFORMANCE DATA

- Recommended Operating Pressure:
 - Positive: 6" WC max
 - Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

LABELS



PRO
Approved By
Dryer Manufacturers

