



V230 FLEXIBLE PIPE (PLAIN ENDS)



DESCRIPTION

- Non-insulated general purpose venting duct for low and medium operating pressures
- Non-combustible flexible metal duct made of corrugated aluminum with water-tight continuous lockseams
- Class 0

PRODUCT SPECIFICATIONS

- 8', 10', and 20' lengths
- 3", 4", 5", 6", 7", 8", 9", 10", 12" and 14" diameters
- 3" and 4" diameter available in 25' length
- 8' Length compressed to 24"
- Plain ends
- Thicker Wall than V220

PART NUMBERS


Diameter	Length	Part #	Qty	Package
3"	8'	111250	20	Bulk
	10'	110251	20	Bulk
	20'	110401	25	Bulk
4"	25'	110252	25	Bulk
	8'	110087	12	Bulk
	10'	110253	12	Bulk
5"	20'	110402	16	Bulk
	25'	110315	16	Bulk
	8'	011476	6	Bulk
6"	10'	110256	9	Bulk
	20'	110257	9	Bulk
	8'	011479	4	Bulk
7"	10'	110259	12	Bulk
	20'	110260	6	Bulk
	8'	011482	4	Bulk
8"	10'	110262	8	Bulk
	20'	110263	4	Bulk
	8'	110264	4	Bulk
9"	10'	011487	6	Bulk
	20'	110266	4	Bulk
	8'	110267	4	Bulk
10"	10'	110268	4	Bulk
	20'	110269	4	Bulk
	8'	110383	4	Bulk
12"	10'	110384	4	Bulk
	20'	110385	4	Bulk
	8'	110247	4	Bulk
14"	8'	110248	2	Bulk
	8'	110460	12	Display Bag

With two steel screw clamps:



PERFORMANCE DATA

- Recommended Operating Pressure:
 - Positive: 6" WC max
 - Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

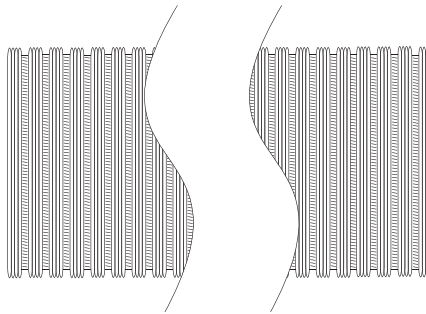

AIRFLOW

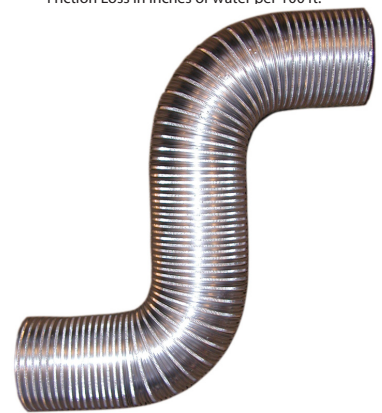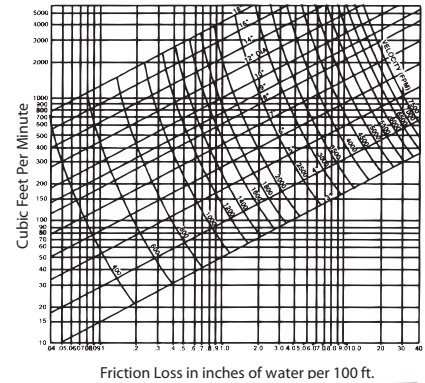

LABELS

