



# LONG LENGTH SILVERDUCT™



## DESCRIPTION

This Product is constructed to meet UL™ 2158A transition duct for clothes dryers.

There is no UL® label. UL® specifies clothes dryer transition duct venting can only be 8 foot in length

## PART NUMBERS

Diameter	Length	Part #	Pkg	Qty
4"	20'	111506	Display Box	6
	25'	111504	Ind. Box	5
	50'	111505	Ind. Box	4

## PRODUCT SPECIFICATIONS


- SilverDuct™ Flexible Hose
- Steel wire supported, multiply design of aluminum and polyester (plastic)

## PERFORMANCE DATA

- Recommended Operating Pressure: 6" w.g. positive
- Recommended velocity: 5,000 FPM
- Operating Temp. Range: 0°F to +200°F  
Maximum 250°

INSTALLATION: Connections shall be made per installation instructions outlined by the appliance manufacturer

Air Friction Chart

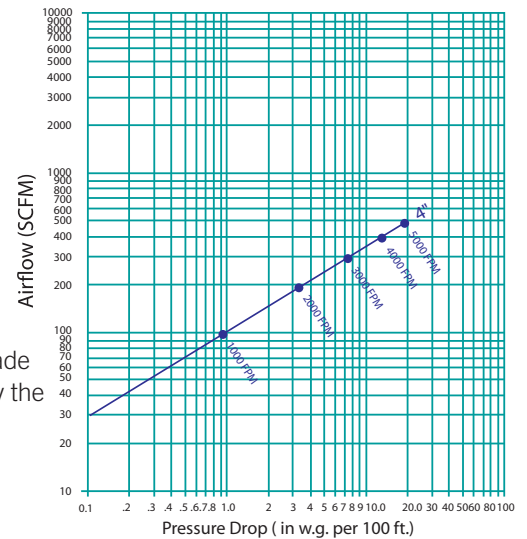

Friction loss is computed in inches of water gauge per 100 feet of straight duct.

## APPROVAL

- SilverDuct™ is constructed to meet UL® 2158A Transition Duct for Clothes Dryers; but when it is sold in lengths over 8 feet long is is not eligible to carry the UL® label
- The Steel wire and foil provide some flame resistance, however, all wire helix designs are held together with layers of aluminum foil and polyester plastic. Clothes dryer manufacturers may limit the use of plastics in venting. Check the dryer warranty and installation instructions as well as your local building codes for appropriate use.

## LABELS





# SILVERDUCT™



## DESCRIPTION

Silverduct™ UL® 2158A clothes dryer transition duct provides flame resistance. It crushes easily behind the dryer and is held together with layers of aluminum foil and polyester plastic. Clothes dryer manufacturers may limit the use of plastics in venting. Check the dryer warranty and installation instructions as well as your local building codes for appropriate use.

## PART NUMBERS

Diameter	Length	Part #	Pkg	Qty
4"	5'	110504	Bulk	12
	5'	010507	Bulk	72
	5'	110676	Display Box	6
	8'	110505	Bulk	12
	8'	010508	Bulk	54
	8'	110677	Display Box	6
8'	8'	010793	Display Box	20
	With Two Spring Tension Clamps			
4"	5'	110670	Bag	12
	8'	110671	Bag	12
With Two Plastic Screw Clamps:				
4"	5'	110672	Display Box	12
	8'	110673	Display Box	12

## PRODUCT SPECIFICATIONS


- UL® listed and labeled as foil dryer transition duct
- Steel wire support, multi-ply design of aluminum and polyester

## PERFORMANCE DATA

- Recommended Operating Pressure: 6" w.g. positive
- Recommended velocity: 5,000 FPM
- Operating Temp. Range: 0°F to +200°F  
Maximum 250°

INSTALLATION: Connections shall be made per installation instructions outlined by the appliance manufacturer

Air Friction Chart

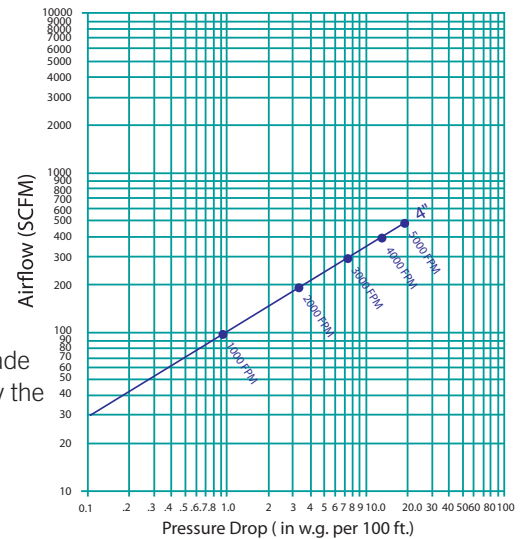

Friction loss is computed in inches of water gauge per 100 feet of straight duct.

## APPROVAL

- UL® 2158A Transition Duct for clothes dryers for installations of 8 feet or less only.
- The Steel wire and foil provide some flame resistance, however, all wire helix designs are held together with layers of aluminum foil and polyester plastic. Clothes dryer manufacturers may limit the use of plastics in venting. Check the dryer warranty and installation instructions as well as your local building codes for appropriate use.

## LABELS

