




Quality • Value
Performance • Style

SPECIFICATION SHEET

FREEDOM RM


Roof Top Mount Box Awning

- Compact design.
- Lightest weight roof mounted box awning.
- Self-contained, mounts using concealed mounting brackets.
- Mounting brackets available for most applications.
- Fully retractable and self storing.
- Lateral spring arm design.
- Ground support arms store inside the lead rail and are easy to access.
- Can use the Buena Vista room for added living space.



- Easy to use manual crank operation with positive crank lock when closed;

- Also available as 12V motorized;

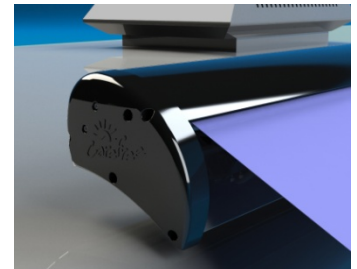

SPECIFICATIONS

Widths:	meters	2.44	2.57	3	3.5	4
	inches	96	101	118	138	157
Extension:		180cm (72")	200cm (80")	250cm (98")		

LEADING EDGE POSITION ACTUATION AND CONTROL

Power:	Lateral Arm Spring		Minimum Tension		Open
Position Control:	Motorized:	Roll Out/In Controlled by Electrical Motor			
	Manual:	Roll Out/In Controlled by Manual Crank (crank ratio = 2.7:1)			
Note: 4.5 meter and 5 meter awnings are only available in the motorized configuration.					


MOTOR SPECIFICATIONS

Motor Type:	Tubular				
Power:	12VDC	Minimum: 10VDC	Output: 30 Watts		
	Nominal Current: 2.5Amps		Max Current: 14Amps (stall @ min voltage)		
Power Source:	Motor and switch is routed and hardwired into the vehicle's 12V system				
Torque	Continuous: 6Nm/4.5 ft-lbs.		Tightening: 18Nm/13.2 ft-lbs.		
Speed	15 rpm				

COLORS AVAILABLE

Case	Satin, White or Black				
Fabric: ¹	Vinyl or Woven Acrylic				

FREEDOM RM

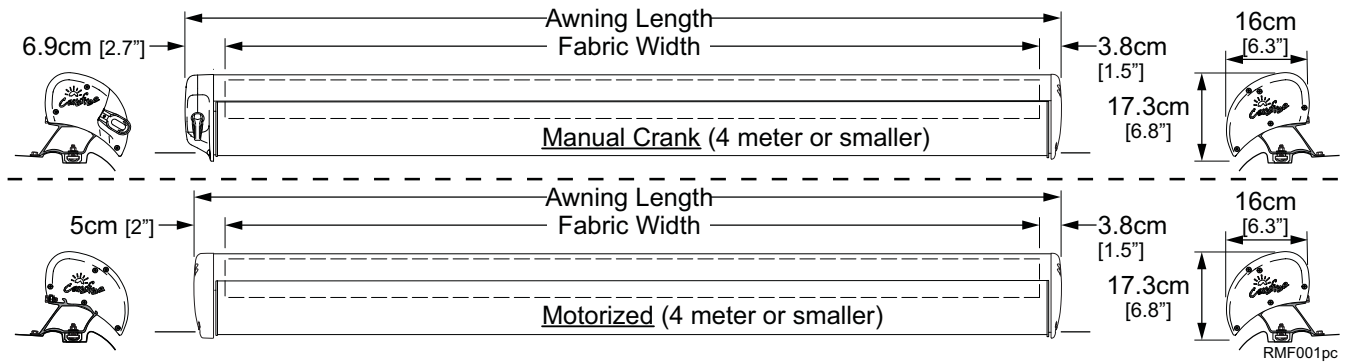

MEASURING AND INSTALLATION TIPS:

- For manual awning, actual measurement is 2" smaller than stated size; for motorized version, actual measurement is 2.69" smaller than stated size.
- Awning is mounted using concealed brackets.
- Mounting brackets available for some applications.
- The awning must be mounted into the vehicle structure to provide adequate support.
- Two bracket kits are available. For 4m and smaller, the sprinter bracket kit includes hardware to attach to the sprinter roof channel. The 2nd kit are brackets used for flat roof applications.
- For detailed information, refer to the installation and operations manuals.
- Maximum leg extension is 97".

ORDERING:

You will need to know the following information:

- Length of awning. Length measurement is the actual length of the case including end caps.
- Canopy color.
- Case color.
- Manual or 12V motorized.
- Type of Bracket
- All orders are custom and Non-Returnable.

SHIPPING:

- Cannot be shipped UPS. Applicable freight charges apply.