




Quality • Value
Performance • Style

SPECIFICATION SHEET


MARQUEE

12V Lateral Arm OtD and Window Awnings

- The Marquee OtD (Over the Door) and Window Awnings are state of the art lateral arm awnings.
- When retracted, the housing provides protection against the elements while the streamlined styling blends in with the coach sidewall and is a perfect complement to other Carefree products.
- Each unit is equipped with lateral support arms. No vertical arms to interfere with coach sidewalls, custom graphics or equipment that may be mounted on the sidewalls.
- Heavy duty construction with an all metal chassis and outdoor rated tubular motor.
- Uses a standard awning rail for mounting.
- Easy to use manual override to close the awning when power is lost. (available after July, 2010)

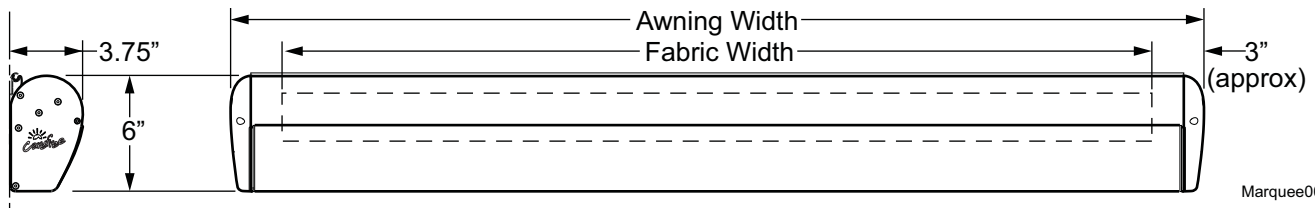

OtD (Over the Door)

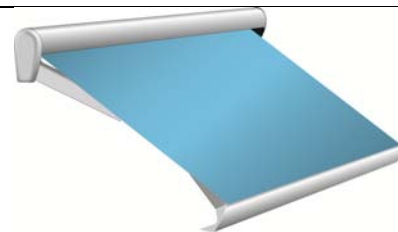

Window

EXTENSION:	36"	36"
AVAILABLE WIDTHS:	50", 54", 60", 66", 72"	50", 54", 60", 66", 72", 7', 8', 9', 10' 11', 12' & 13'
PITCH:	3 degrees (approximate)	33 degrees (approximate)
LEADING EDGE POSITION ACTUATION AND CONTROL		
Power:	Lateral Arm Spring	
Minimum Tension	Open	
Position Control:	<i>Motorized:</i>	Roll Out/In Controlled by Electrical Motor
MOTOR:	Tubular, 12VDC	
CONTROLS:	Motor and control switch are hardwired into the vehicle's 12V system	
COLOR:	Case	Black (w/ black endcaps), White (w/ white endcaps)
	Fabric	Woven Acrylic Fabric - refer to sales literature for colors available

INSTALLATION TIPS

- Mounts with standard awning rail (slot up).
- Minimum center line of awning rail position: OtD = 13" above door; Window = 7.5" above window molding.
- Refer to the installation and operations manuals.

SHIPPING

- Applicable freight charges apply.

Look through our comprehensive collection of rv awnings and shades right away.