




Quality • Value
Performance • Style

SPECIFICATION SHEET

PIONEER

Manual Crank Patio Awning

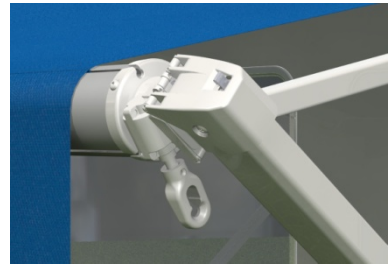


- Easy to use manual crank operation. No springs.
- No travel locks required. The manual crank gear mechanism securely holds the awning during travel - no billowing.
- When the awning is extended, the arms can be left on the RV or rotated down and placed in the carport position (vertical).
- The pitch can be set to optimize shade and rain run-off.
- Simple Installation.
- Optional factory installed LED lighting available. LED strip mounts on roller tube. Wiring is routed through the canopy hem.

SPECIFICATIONS

LENGTH:	8' [2.44m] to 21' [6.4m] (in 1' [.3m] increments)
FABRIC EXTENSION:	92" [234cm] approximate
POSITIONING CONTROL:	Manual Crank Crank Ratio 2.7 : 1
COLOR:	
<i>Hardware:</i>	White or Black
<i>Fabric:</i>	Vinyl or Acrylic
<i>Fabric Wrap:</i>	Weatherguard (vinyl), FLXguard, Alumaguard or Uniguard

PIONEER

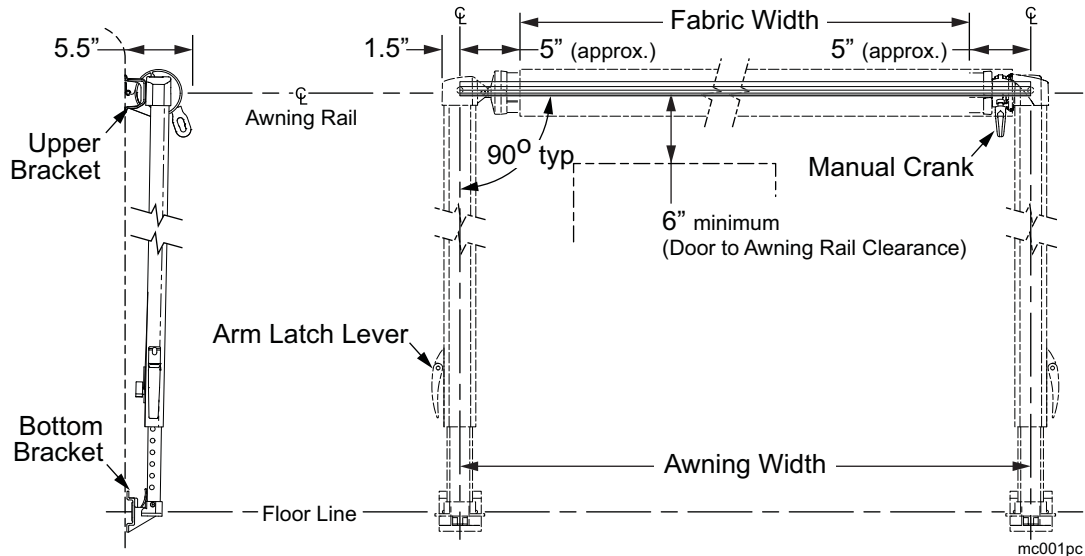

INSTALLATION SPECIFICATIONS

- Length of the awning is determined by measuring from center of arm to center of arm. Be sure the arms will not interfere with any compartments, lights, mirrors, doors etc.
 - At the awning rail canopy will measure 10" shorter than the stated awning size.
 - Roller tube will measure 7" shorter than the stated awning size.
 - Alumaguard will measure 9" shorter than the stated awning size.
 - Uniguard will measure 7" shorter than the stated awning size.
- 1997 and newer Spirit FX, Fiesta & Simplicity awnings can be upgraded to the Pioneer Manual Crank Awning.
- Refer to the installation and operations manual.

ORDERING

You will need to know the following information:

- Length of awning (center of arm to center of arm measurement).
- Hardware size and color.
- Canopy fabric and color.
- Weatherguard or Alumaguard/Uniguard color.
- All orders are custom and Non-Returnable.

SHIPPING:

- Cannot be shipped UPS. Applicable freight charges apply.