

SPECIFICATIONS

FIRST STAGE SEDIMENT FILTER:

5.0-micron melt-blown polypropylene. Four-layer, gradient-density construction. NSF certified.

SECOND STAGE CARBON BLOCK FILTER:

0.5-micron solid block coconut shell activated carbon. NSF certified.

FILTER HOUSINGS:


FDA grade, high flow canisters. Buttress style attachment threads. NSF certified.

CONNECTORS:

All stainless steel. Standard $\frac{3}{4}$ " garden hose threads.

DIMENSIONS: Height: 15". Width: 14 $\frac{1}{4}$ ". Depth: 7 $\frac{3}{8}$ "

WEIGHT: 22 lbs.

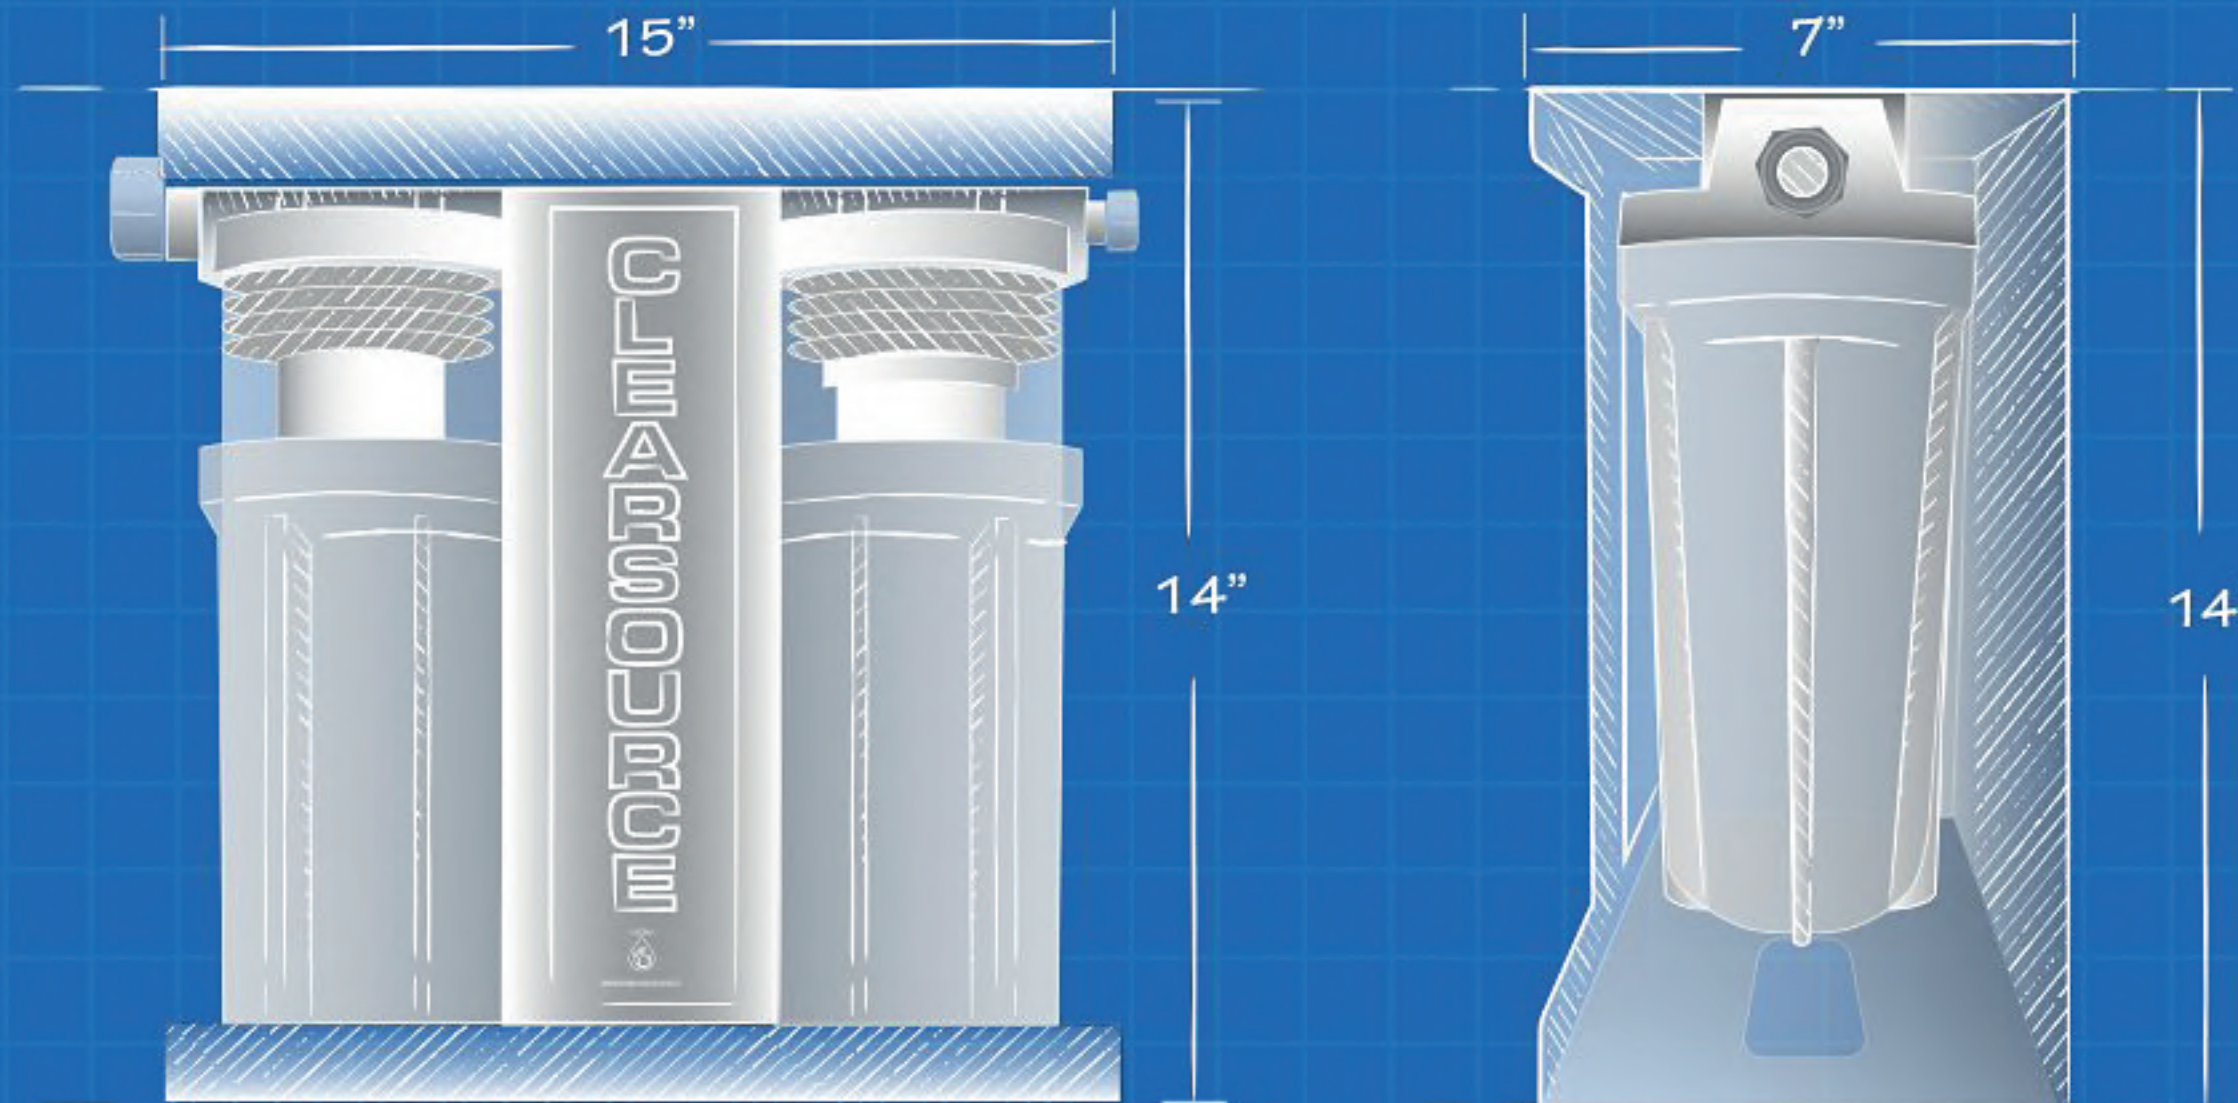

CHASSIS:

14 gauge steel. 3M primer. Powder coat finish.

FLOW RATE:

6.5 gallons per minute at 40 PSI inlet pressure.

FILTER SERVICE LIFE: 2000 gallons.

OPERATING TEMPERATURE RANGE:

35 – 120 degrees Fahrenheit.

COMMON CONTAMINANTS TREATED: Silt, sediment, giardia cysts, cryptosporidium, chlorine, chloramines, trihalomethanes, volatile organic compounds, pesticides, and artificial colors.