



RVF-10

Recreational Vehicle/Marine Water Filter System

Installation and Operation Instructions

The RVF-10 system is designed to reduce foul tastes, odors and sediment from potable drinking water. This system includes 3/4" flexible hose couplings, and the NCP-10 replacement cartridge.

NOTE: This system may reduce water flow slightly.


INSTALLATION


1. Wrap the 3/8-inch fitting (on the 3/4-inch female hose adapter) with Teflon[®] tape (included), and screw into the INLET side of the filter system. Wrap the male hose adapter with Teflon tape and screw into the OUTLET side of the filter system. Use a wrench to tighten firmly. **DO NOT OVERTIGHTEN**. About one thread should remain visible when fittings are tightened.
2. To protect the system from possible damage, install the system between two hoses. The short hose (included) should be used to connect the outlet side of the filter system with the storage tank inlet. A sanitary hose can be used to connect the water faucet to the inlet side of the filter system.
3. Before running water through the RVF-10 system into the storage tank, flush out any carbon fines that may be present in the carbon cartridge. Disconnect the hose at the storage tank and turn the water supply on for approximately one minute. Turn off water supply and reconnect the hose to the storage tank.

Installation is now complete.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CAUTION: The RVF-10 system must be protected from freezing. Failure to do so may result in cracking of the filter and water leakage.

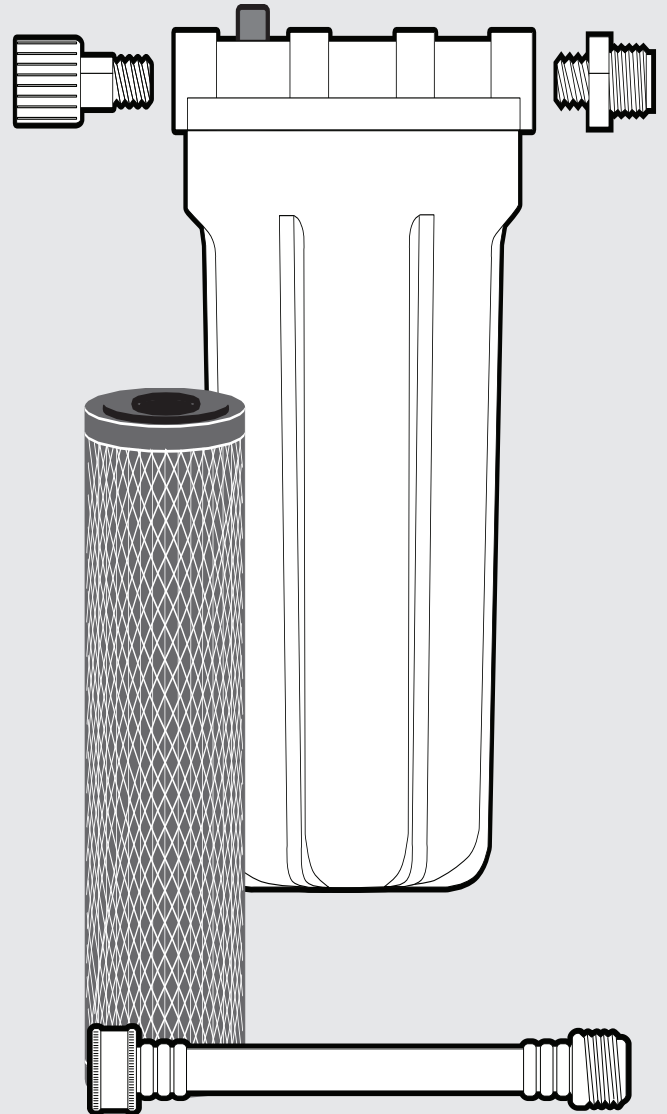

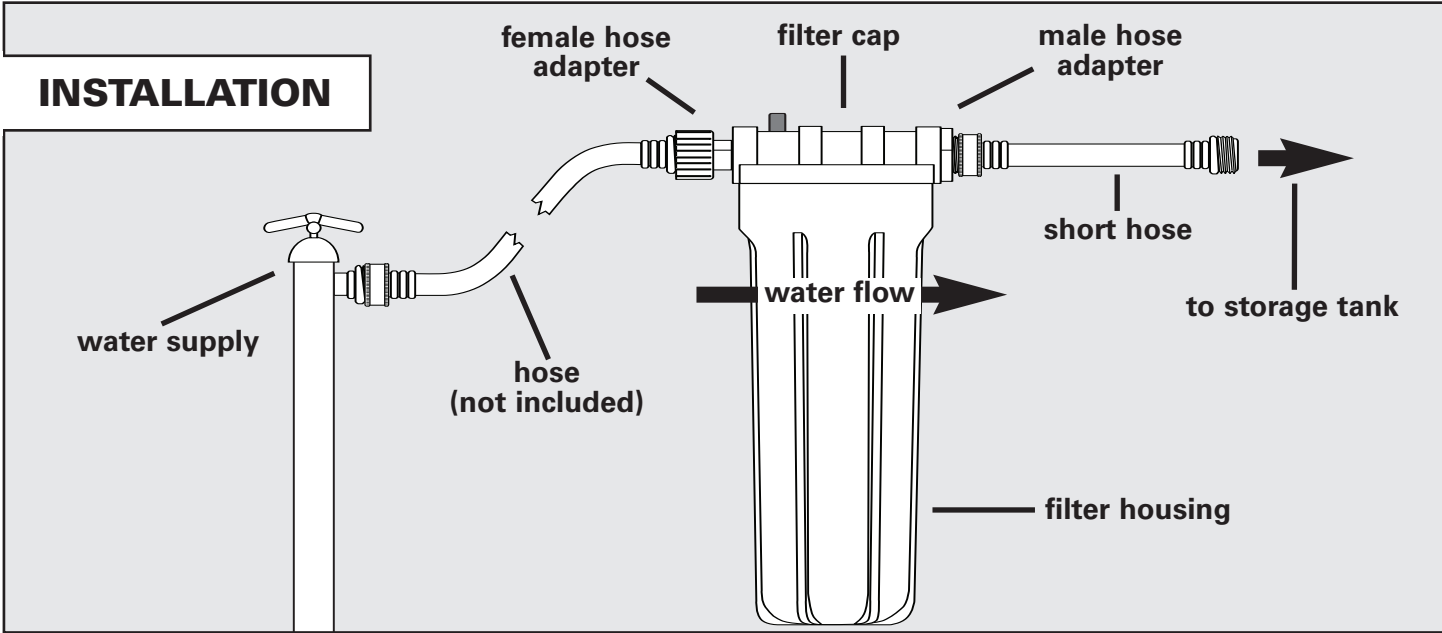

CARTRIDGE REPLACEMENT

T
 U R
 R
 A
 R
 R O O L O

P O

NOTET O
 I
 O

P
 DO NOT OERTIGHTEN
 B R
 D
 T

T

R

T
 S C R

TROUBLESHOOTING

L
 T
 C O O
 L O
 S

L
 T
 T D

REPLACEMENT PARTS

OR

S
CARTRIDGES
 NCP