




TUB/SHOWER TRIM KIT

for 3-Handle Pfister® Verve
JUEGO DE RENOVACIÓN DE 3-LLAVE DE PFISTER®

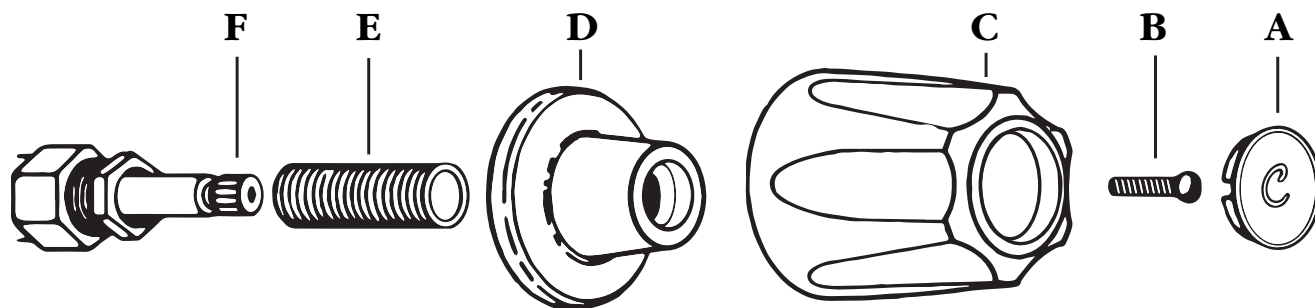

Instructions

Tools Required: Screwdriver

1. Turn off water supply. Remove old handle (C) by prying off index button (A), removing screw (B) and pulling off handle (C).
2. Remove old flange (D) by unthreading. Remove old flange nipple (E) by unthreading.
3. Install new nipple by threading tapered end into bonnet nut (F). It may be necessary to shorten new nipple but this can easily be done with a saw.
4. Install new flange (D) by threading onto nipple (E) and tightening to wall.
5. Place new handle (C) on faucet stem, then tighten with new handle screw (B).
6. Replace index button (A) and turn on water supply to faucet.