


FURRION

8" ACTIVE SUBWOOFER


FSW8P12-CF



VIBRATIONSMART™



CLIMATESMART™




SIGNALSMART™

- Audio optimized for recreational vehicles
- PP reinforced cone extends frequency response and minimizes distortion



FSW8P12-CF | 8" ACTIVE SUBWOOFER

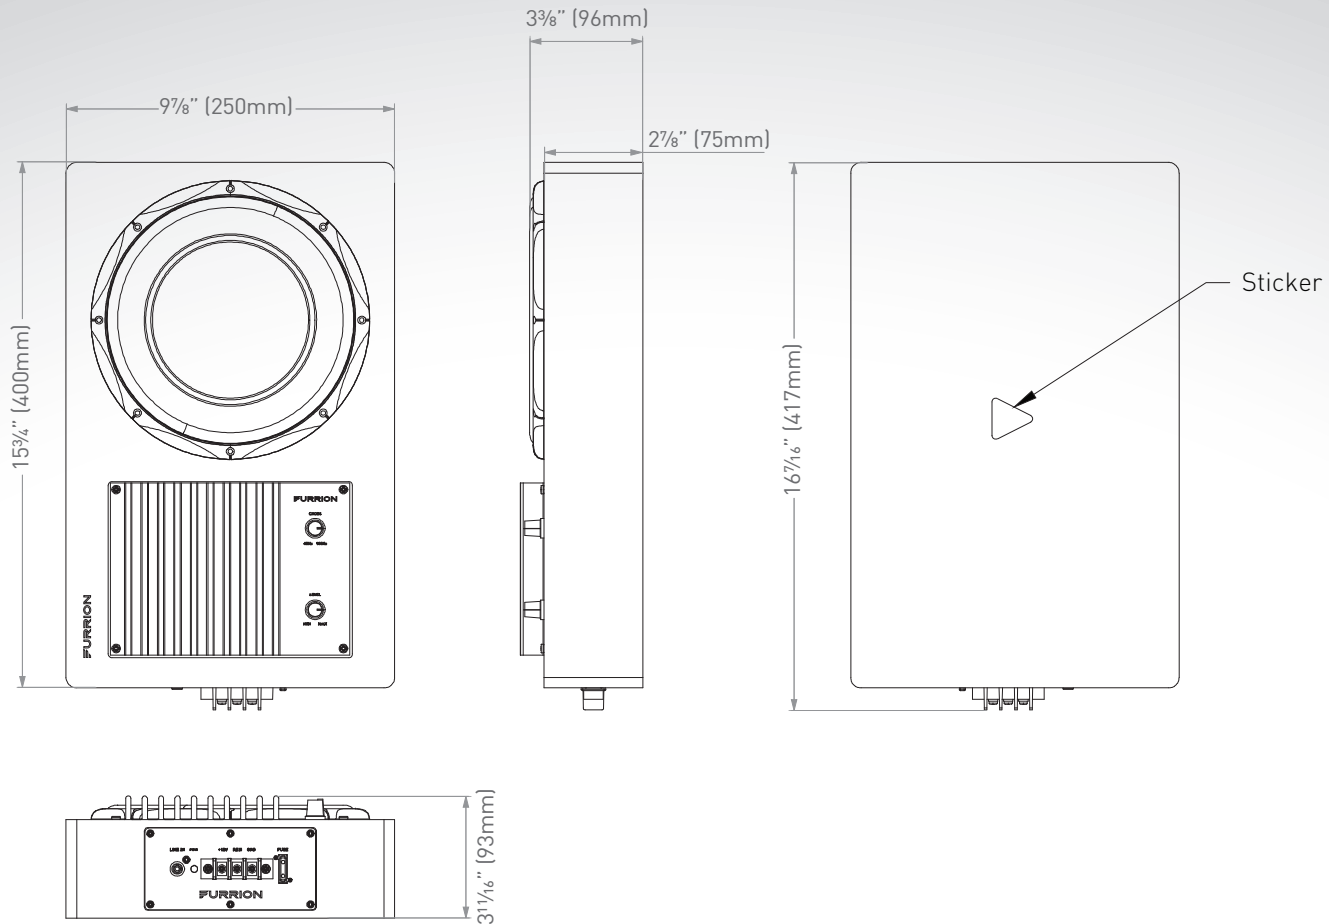

Specifications

Voice Coil Electro Impedance	2Ω@100Hz / 4Ω@100Hz
Resonance Frequency	40±20% Hz
Characteristic Sensitivity	±3dB
Harmonic Distortion	1% 2Ω@100Hz / 1% 4Ω@100Hz
Temperature Range	-20°C to +70°C
Max Power	120W
Supply Voltage	11V - 15V
Frequency Response	80Hz - 20kHz
Input	1 RCA input

Packaging Information

Packaging Type	Color Gift Box
Quantity (pcs)	1
Individual Packaging Dimensions (L x H x W)	17 3/4" x 11 13/16" x 5 5/16" (450 x 300 x 135mm)
Individual Packaging Gross Weight (kg/lbs)	5.2/11.44
Individual Packaging Net Weight (kg/lbs)	4/8.8

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box	4
Master Carton Dimensions (L x H x W)	18 3/4" x 13 1/8" x 22 11/16" (476 x 333 x 576mm)
Master Carton Gross Weight (kg/lbs)	20.9/46.1
Master Carton Net Weight (kg/lbs)	18.1/39.9