

## 40" BUILT-IN ELECTRIC **FIREPLACE**

FF40SC15A-BL





WORKS WITH

UNIMOTE





OVERHEATING SAFETY CUT-OFF



TEMPERATURE SLIDE-OUT CONTROL SETTINGS



HEAT UP







SAFETY CUT-OFF

TO 500sq.ft

WITH 4-LEVEL LED FLAME TECHNOLOGY

3 FLAME COLORS


• Flame effect technology: traditional flame


VIBRATIONSMART™ CLIMATESMART™


- Three flame color options: orange, blue and red
- 4 flame brightness settings
- Black tempered glass front panel
- Dimmer and heating

- Adjustable temperature settings from 65°F to 95°F
- Temperature control
- Timer setting up to 5 hours
- LED control board
- Remote control included

## FF40SC15A-BL 40" BUILT-IN ELECTRIC FIREPLACE

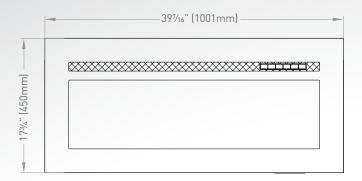

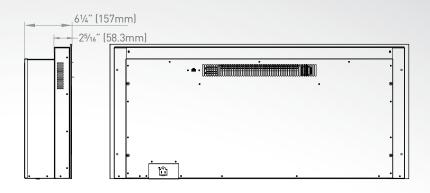



## Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1465W
LED Control Board	$\sqrt{}$
Timer	$\sqrt{}$
Log Fuel Effect	$\sqrt{}$
Remote Type	IR

## Dimensions

Product Size (W x H x D)	39 <sup>7</sup> / <sub>16</sub> " x 17 <sup>3</sup> / <sub>4</sub> " x 6 <sup>1</sup> / <sub>4</sub> "
	(1001 x 450 x 157mm)
Packaging Information	
Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	41" x 19½" x 8"
	(1045 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	22/49.5
Individual Packaging Net Weight (kg/lbs)	20/44
Box Container Qty	
20' - Box Container Qty	246
40' - Box Container Qty	522
40'H - Box Container Qty	605