



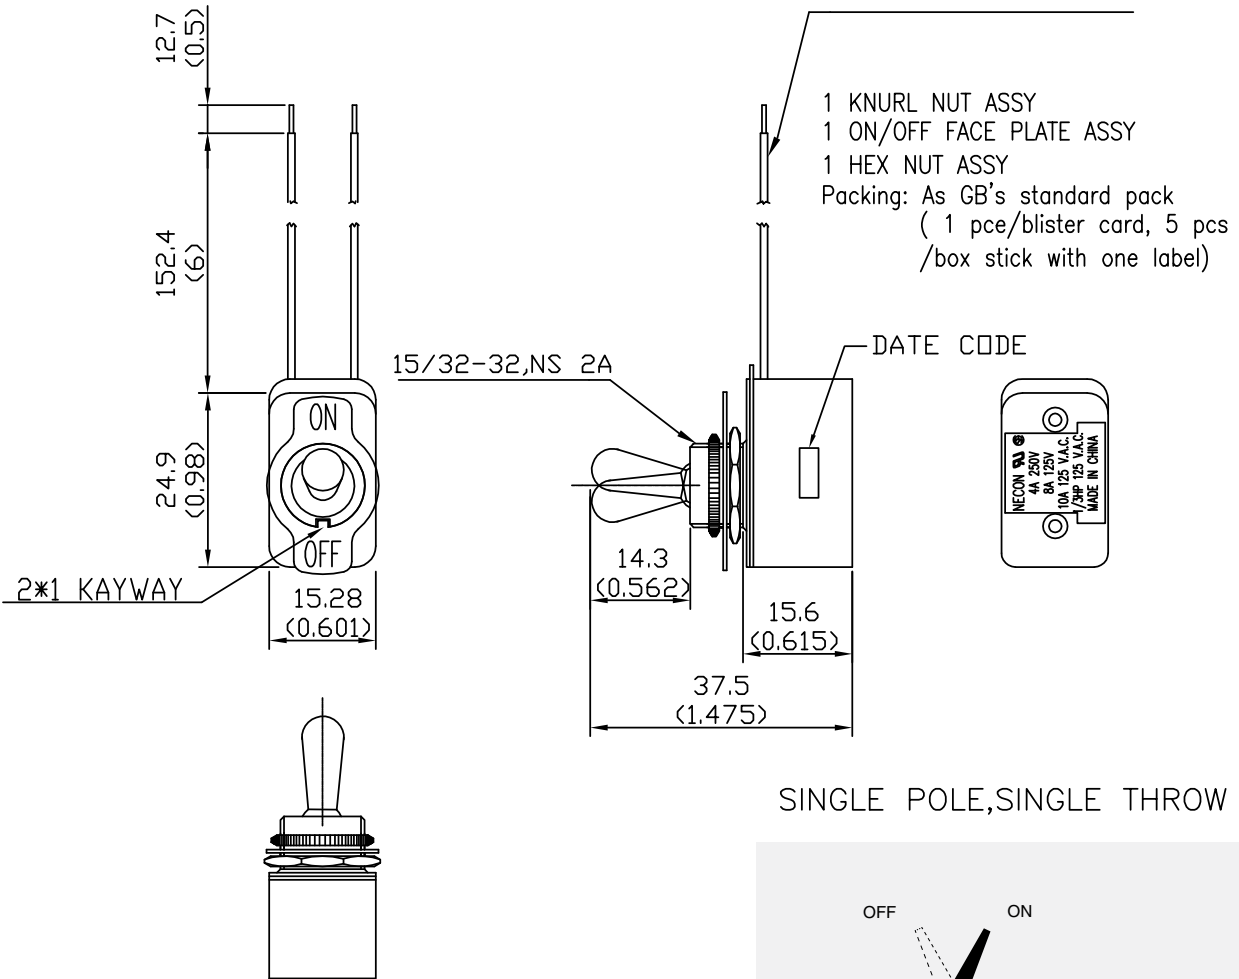


Rating	4A 250V, 8A 125V 10A 125V.A.C., 1/3HP 125V.A.C. 	Mount Hole		Circuit Structure	
Contact R	50m ohm Max.			OFF	
Insulation R	DC 500V 100M ohm Min.	ON			
Dielectric Strength	AC 1500V 1 minute				
Circuit	2P SPST ON-OFF				

1.  RECOGNIZED.

STRANDED BARE COPPER
WIRE 18 AWG 105°C
UL & CSA. AWM #1015



SINGLE POLE, SINGLE THROW

