

MOEN®

Specifications

DESCRIPTION

- Fixed mount showerhead
- Various finishes identified by suffix
- 1/2" IPS connection

OPERATION

- Five functions
- Rotate outer ring to select function

FLOW


- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi
(for models manufactured after 3/1/18)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi
(for models manufactured before 3/1/18)

STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations



WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

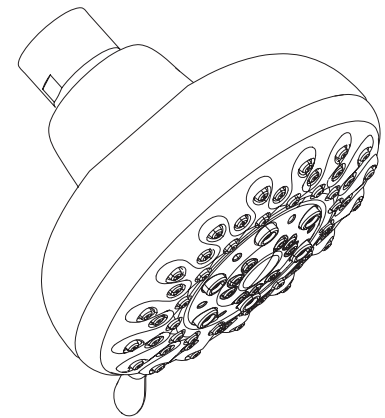

Banbury™
5-Function Showerhead

Model: 23045 series

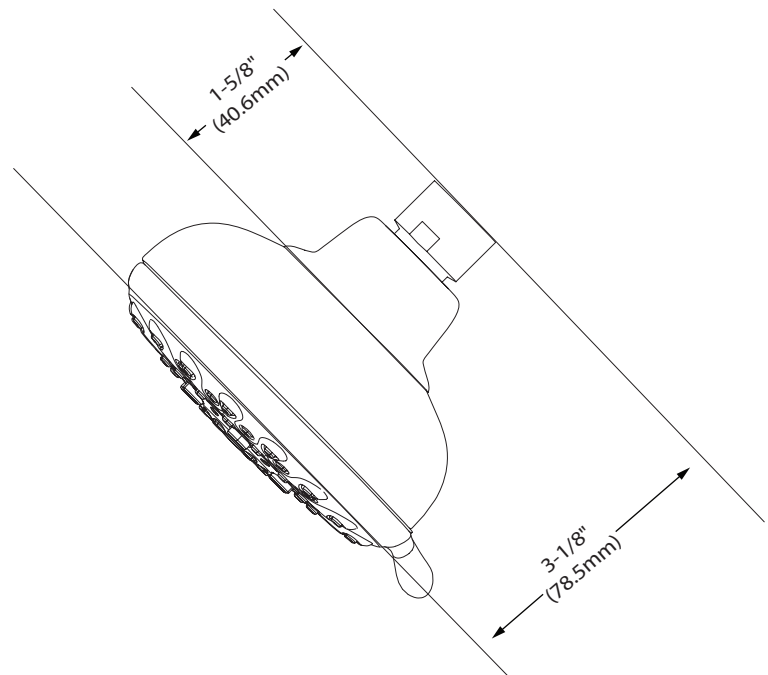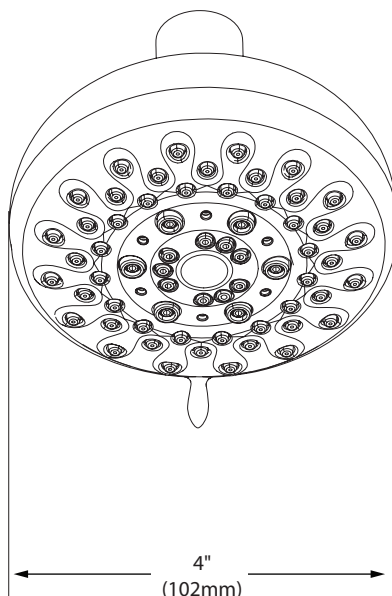

CRITICAL DIMENSIONS

(DO NOT SCALE)

Learn more about home bath and faucets we have.