

MOEN®

Specifications

DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS - exterior, CC - interior
- Includes showerhead, arm and flange

OPERATION

- Dual control
- Lever handles
- Volume and temperature controlled by rotating handles toward spout to open


FLOW


- Showerhead is designed to deliver 1.75 gpm (6.6 L/min) max.
(for models manufactured after 3/1/18)
- Showerhead is designed to deliver to 2.5 gpm (9.5 L/min) max.
(for models manufactured before 3/1/18)

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel materials

STANDARDS


- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations
- ADA  for lever handles
- Meets WaterSense® criteria
- Meets New York City Local Law No. 57

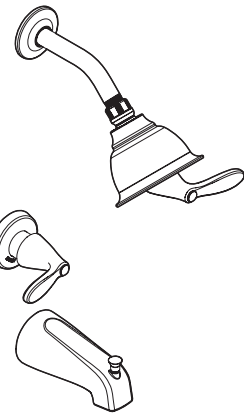

Adler™
Two-Handle Tub/Shower Valve
Model: 82602 Chrome



Showerhead 183064 is listed

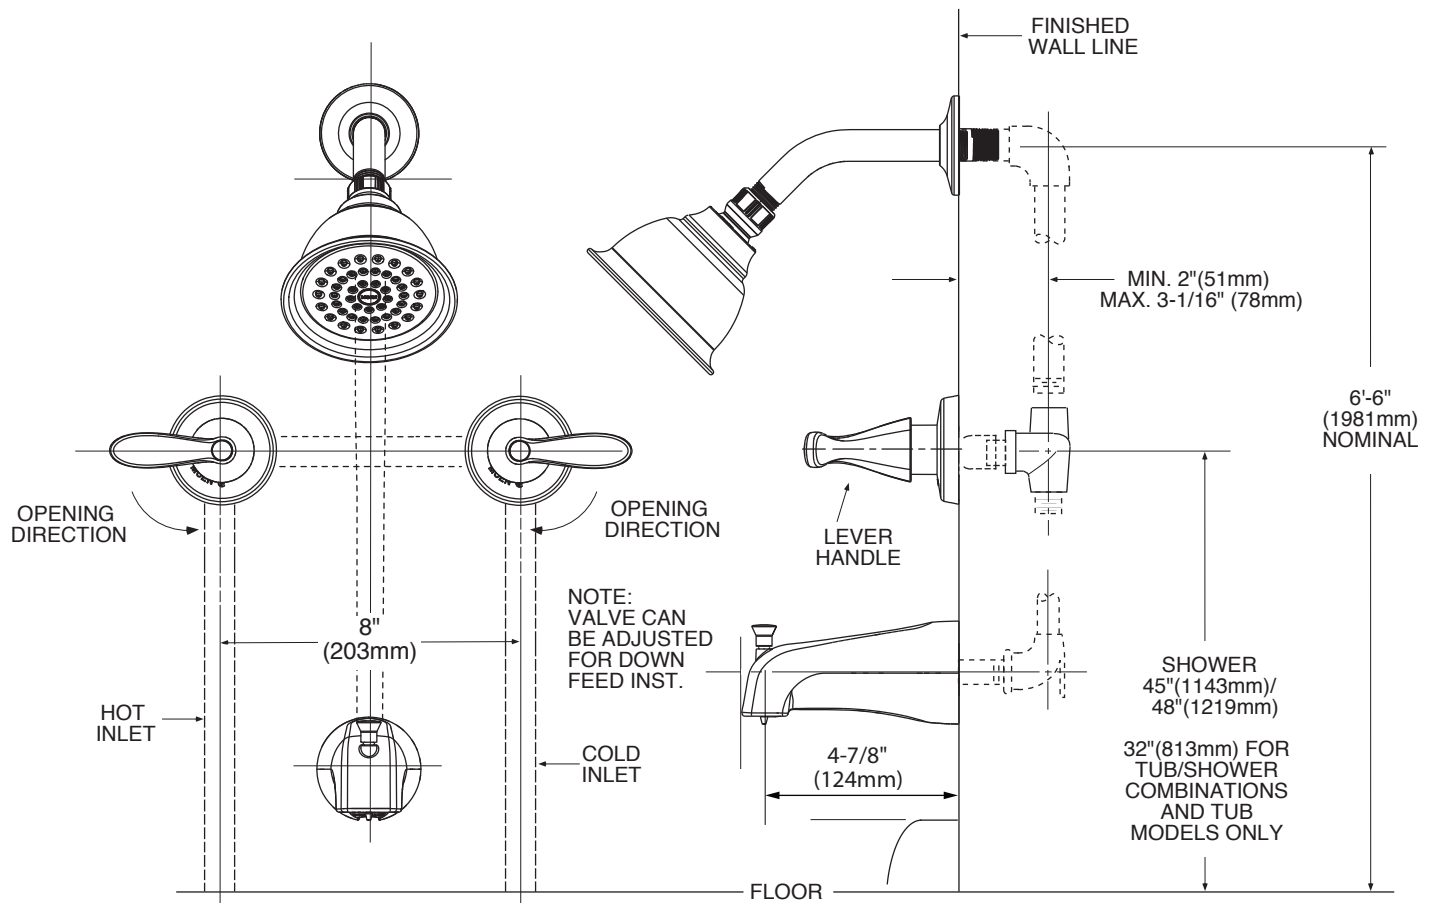

CRITICAL DIMENSIONS

(DO NOT SCALE)