

All 5/8 Inch Locks

"A" Dimension - 5/8 inch

"B" Dimension - 1/2 Inch Usable Thread\*

"C" Dimension - 3/4 Inch Cutout

\* Fits door thickness up to 3/8"

All 7/8 Inch Locks

"A" Dimension - 7/8 inch

"B" Dimension - 3/4 Inch Usable Thread\*

"C" Dimension - 3/4 Inch Cutout

\* Fits door thickness up to 5/8"

All 1 1/8 Inch Locks

"A" Dimension - 1 1/8 inch

"B" Dimension - 1 Inch Usable Thread\*

"C" Dimension - 3/4 Inch Cutout

\* Fits door thickness up to 7/8"

All 1 3/8 Inch Locks

"A" Dimension - 1 3/8 inch

"B" Dimension - 1 3/16 Inch Usable Thread\*


"C" Dimension - 3/4 Inch Cutout

\* Fits door thickness up to 1 1/8"

Offset Reversible Cams Provide 1/4 Inch Offset

Note: Ace Keys ( round ) can only be removed in locked position. Make sure cam bar is installed so it engages door frame in the locked position.

# Cam Lock Dimensions

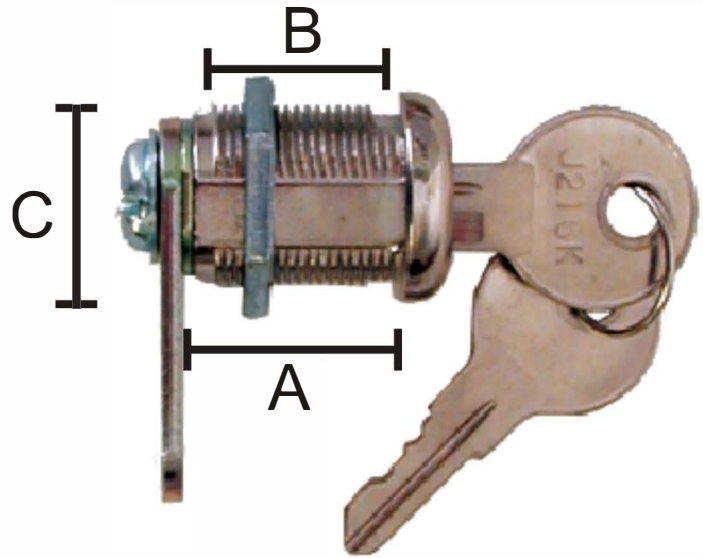

Standard Cam Lock Shown  
Dimensions Apply To All Locks

