**FIGURE 1**

## Style Lite® and Style Plus® Pedal Cable Kit

### **Kit Contains**

- ▶ Cable (PN 34376)
- ▶ Waste ball seal (PN 34383)
- ▶ Closet flange seal (PN 02125)
- ▶ Instruction sheet (PN 34107)

### **Needed**

- ▶ Towel(s)
- ▶ Plastic trash bag
- ▶ Pliers
- ▶ Phillips-head screwdriver
- ▶ 1/2-inch wrench

### **Before Beginning**

- ▶ Read all instructions completely.
- ▶ Reduce holding tank odor: Rinse toilet with water, drain holding tank, and add Thetford Holding Tank Deodorant.
- ▶ Wear protective gloves, glasses, long sleeves, and nose/face mask to avoid contact with human waste.
- ▶ Wash entire toilet thoroughly.
- ▶ Refer to Figures 1, 2 and 3 for component locations. Style Lite shown.

### **Remove Toilet**

1. Turn off RV water supply per RV Owner's Manual.
2. Flush toilet to drain.
3. *Style Plus* - Remove shroud:
  - a. Hold down pedal and unhook two O-rings holding shroud together in back of unit.
  - b. Spread shroud apart while pulling it forward.
4. Place towel(s) behind toilet

under water connection to catch water.

5. Disconnect RV water supply from water valve.
6. Remove closet flange bolt covers (if present) and nuts.
7. Lift toilet from floor and place on trash bag.
8. Cover holding tank opening.
9. Remove old closet flange seal and discard.

### **To Remove Old Cable**

1. Slide clamp up inlet tube, then remove inlet tube from water valve.
2. *Style Lite* - Remove wrap:
  - a. Remove o-ring securing pod and wrap.
  - b. Remove wrap retaining screw.
  - c. Spread wrap apart, then remove from toilet.
3. Remove four closet nuts and corresponding washers.
4. Lift off bowl.
5. With pliers, remove the return spring from end of drive link.
6. Pull cable through slot on water valve drive arm, then remove cable ball from water valve drive arm.
7. Slide cable ball through slotted opening in pedal to detach.
8. Turn toilet upside down.
9. Remove pedal retaining screws, then remove pedal retainer.
10. Remove pedal.
11. Turn toilet right-side up.
12. Squeeze locking tabs of cable casing at front of toilet, then push cable casing up through base.
13. Rotate cable casing near water valve drive arm until there is access to locking tabs.
14. Squeeze tabs together, then remove cable from base.

### **To Replace New Cable**

1. Install new cable casing into base near water valve drive arm until locking tabs snap into place.
2. Install cable ball into water valve drive arm.
3. Snap cable ball into water valve drive arm with screwdriver.
4. Guide cable into cable path on base, then push cable casing into opening near pedal until tabs lock into place.
5. Turn toilet upside down.
6. Install pedal.
7. Install pedal retainer, then install pedal retainer screws.
8. Turn toilet right-side up.
9. Install cable ball into opening in pedal and slide cable ball back to seat.
10. Rotate water valve drive arm counterclockwise as far as possible, then reattach return spring loop to drive link.

11. Install new waste ball seal, lip side up, onto base.
12. Ensure cable is outside screw bases.
13. Place bowl on base over four mounting bolts.
14. Center bowl over waste ball.
15. Reinstall washers and closet nuts while keeping bowl centered.
16. Place inlet tube over hose barb on water valve, then slide clamp down inlet tube to secure.
17. *Style Lite*: Reinstall wrap:
  - a. Fully seat wrap below bowl lip.
  - b. Replace wrap retaining screw.
  - c. Reinstall o-ring around wrap tabs and pod.

### **Reinstall Toilet**

1. Install new closet flange seal, lip side down, on toilet.
2. Uncover holding tank opening and remove towel(s).
3. Place toilet on floor, aligning mounting holes with closet bolts.
4. Tighten closet flange nuts until toilet does not rock. *Do not overtighten.*
5. Replace bolt covers (if present).
6. Connect RV water supply line.
7. *Style Plus* - Install shroud:
  - a. Spread shroud open, then lower pedal opening over pedal neck.
  - b. Wrap shroud around to back of toilet. Push pedal down, then push shroud into place to engage front fastening device.
  - c. Secure back of shroud with two o-rings -- larger on top and smaller on bottom.
8. Turn on RV water supply per RV Owner's Manual.
9. Flush test toilet, checking for leaks at all connections.

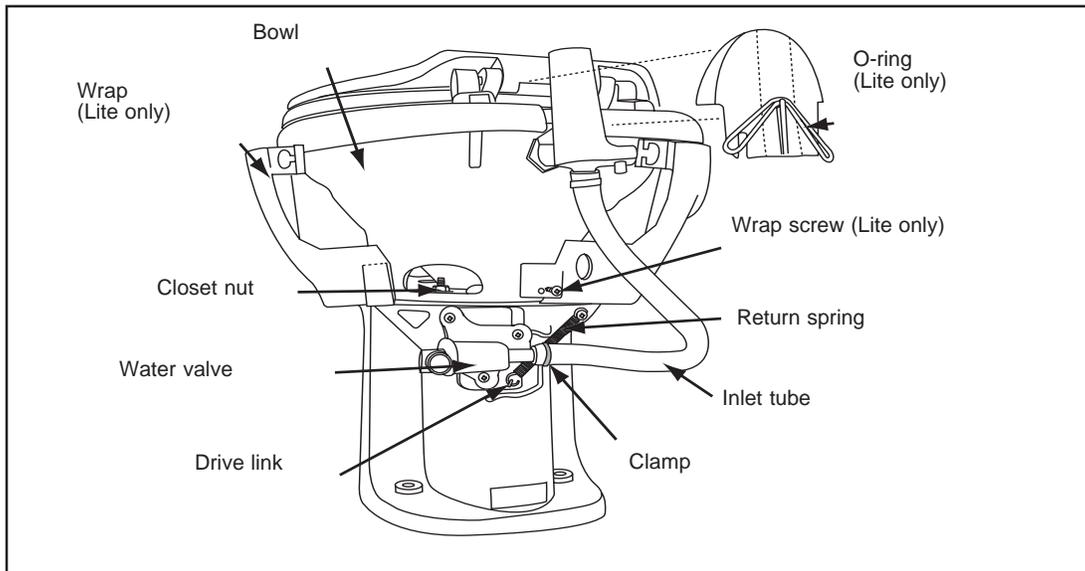


FIGURE 2

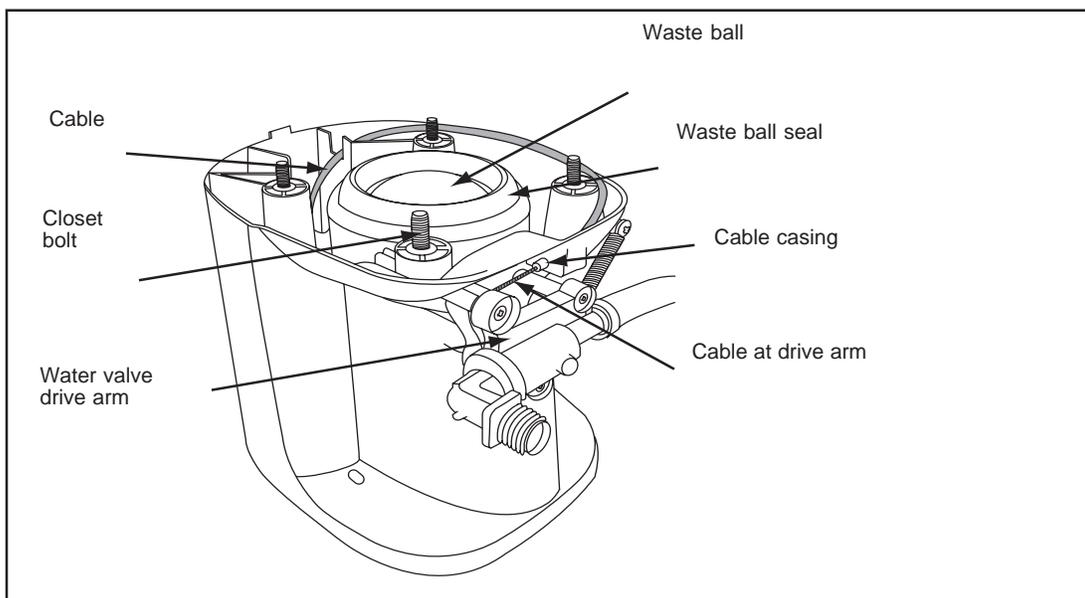


FIGURE 3