



OVER 35 YEARS OF INNOVATION, QUALITY, SAFETY.

IMPORTANT OWNER-OPERATOR INSTALLATION INSTRUCTIONS

A7701 / A7702

FORTRESS GAS LOCK

APPLICATION:

Dual Propane Tank Setups

A7701/A7702 INVENTORY LIST

1- Propane Lock U-Bracket

1- Propane Lock Handle

1- Theft Deterrent Decal

1- Pin Lock

1- Washer SS


1- Rubber Lock Spacer

ASSEMBLY

Step 1-

Between the two propane tanks, remove the handle from the threaded rod. *If equipped with a "C" shaped propane regulator bracket, move the bracket so only the lower portion is attached to the threaded rod. If your propane regulator bracket is shaped like the one in **Photo 1.1**, remove it completely.

Photo 1.1

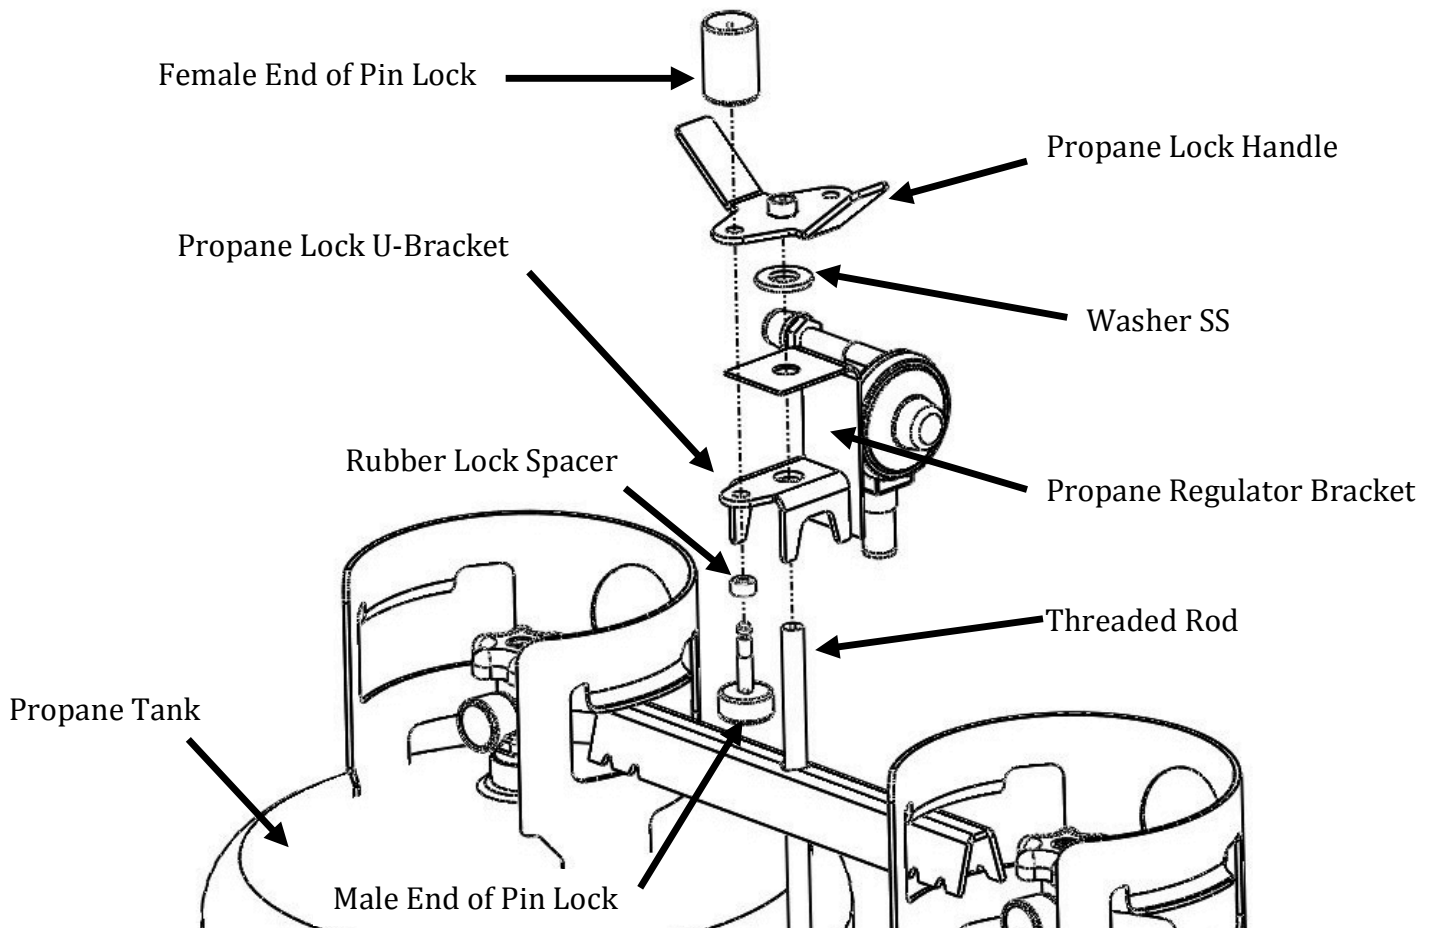

Step 2-

Place the **Propane Lock U-Bracket** over the threaded rod with the feet pointing down. If your coach is equipped with a propane regulator bracket, place the **Propane Lock U-Bracket** with the small hole facing away from the regulator. If your coach is not equipped with a Propane Regulator, place the **Propane Lock U-bracket** with the small hole facing toward the easiest side to reach.

Step 3-

If equipped, place the propane regulator bracket over the threaded rod and allow it to rest on top of the **Propane Lock U-Bracket**. Place the **Washer SS** over the threaded rod. Thread the **Propane Lock Handle** onto the threaded rod and tighten until the propane bottles are secure. Rotate the **Propane Lock Handle** so one of the locking holes lines up with the hole in the **Propane Lock U-Bracket**. (Photo 1.1) Occasionally the threaded rod will not be tall enough to fully install the **Propane Lock Handle**. In most cases, the threaded rod can be loosened from below to provide the required height.

Step 4-

Install the **Rubber Lock Spacer** onto the male end of the **Pin Lock**. Install the male end of the **Pin Lock** from the bottom side of the **Propane Lock U-Bracket**. With the key removed, push the female end of the **Pin Lock** onto the male end of the **Pin Lock** until you hear a “*snap.*” Make sure to check that the **Pin Lock** is securely fastened by pulling the female end of the **Pin Lock** away from the male end.

Step 5-

To remove the **Pin Lock**, insert the key and twist clockwise. Pull the two sides of the **Pin Lock** apart and remove from **Propane Lock U-Bracket** and **Propane Lock Handle**.

Step 6-

Apply the **Theft Deterrent Decal** onto the propane tank cover or the tank itself.

Photo 6.1