

RV BUG SCREEN (A10-1310VP)

PARE-INSECTES POUR VR

For RV refrigerators (except Dometic®)

- Open refrigerator vent door.
- Working from the outside of the door, position the vents screens over the door vents (figure 1). Trim the screen with wire cutters or snips if needed. The screens should cover the entire vent opening.
- Attach each screen to the center bar of each vent with two of the provided P-ties. See figure 2 for tie locations. Trim excess P-tie material.

Cleaning the screens is necessary for proper air flow. Inspect screens frequently and clean as needed. Save the installation tool for reinstallation of screens after cleaning.

Figure 1

Insert screens from OUTSIDE of vent door.

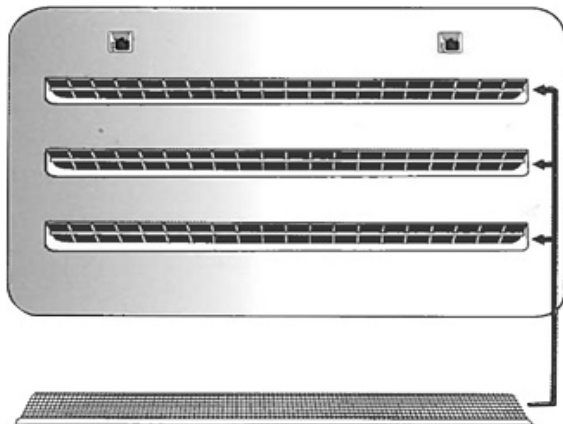


Figure 2

Attach with ties from INSIDE of vent door.

