


WF-8800 Series

55 Amp Deck Mount Converter Charger



THE HEARTBEAT OF TODAY'S RV'S

DESIGNED FOR
RV EXPORTS

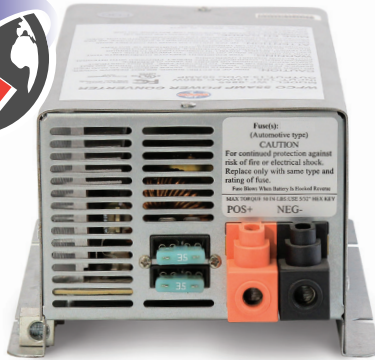

Model WF-8855E
Output: 55 Amps DC
Input: 190-260 VAC,
50/60 Hz, 950W

Power that Fits – Across the Globe

The WF-8800 Series is designed specifically for manufacturers that export RVs, meeting your needs for amps as well as power requirements ranging from 190 to 260 volts and 50 or 60 Hz. This world-traveling converter charger is ideal for use in a wide array of recreational vehicles.

Built on years of RV power equipment experience, the WF-8800 Series converters are made with an advanced 3-stage charger. This unique power source solution is designed to provide clean power wherever it's needed.

Reliability. Vertically integrated, WFCO has total supply chain control, ensuring quality materials, parts, and processes at each stage. Components are quality tested at critical manufacturing stages resulting in zero faults at the final 4-hour burn-in test, helping keep warranty claims below 1%. All models are UL[®] and cUL[®] listed and FCC Class B compliant.

PRODUCT FEATURES



Quiet operation is assured as the cooling fan runs only when needed.



Electronic current limiting automatically shuts down the power during overload or short-circuit conditions.




WFCO Electronics is the leader in manufacturing, distribution, and servicing of power conversion products in the RV industry, preferred more than 4-to-1 by RV manufacturers.

WF-8800 Series

EASY INSTALLATION


All WFCO models are designed with the installer and assembly line in mind. We work with installers every day to find ways to streamline installation to reduce time and fiddle factor.

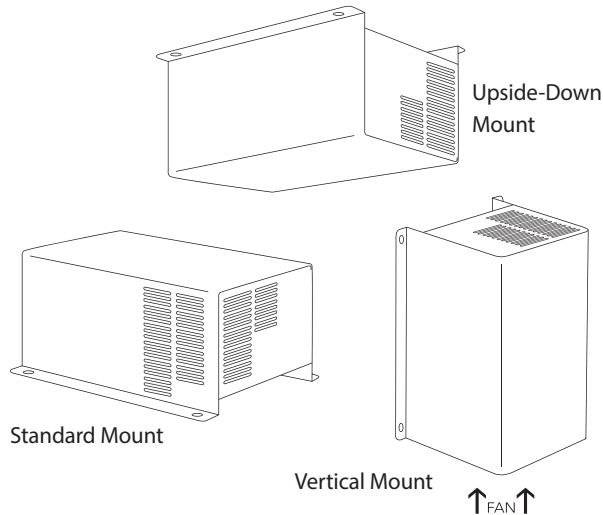

This versatile deck mount converter can be installed in any position, making RV design more flexible for manufacturers. Mount converter vertically with fan at the bottom to enhance cooling. WF-8800 Series converter features easy horizontal installation and can even be installed upside down.



SMART ENGINEERING: THREE STAGE CHARGING IS BETTER. WFCO's automatic three-stage converter handles every charging need for the RV while extending the battery's life. Well-maintained batteries should never need more than two-stage (Normal and Trickle) charging. Our third stage (Bulk) is provided for the rare times a battery needs extra-power for charging.



Fully insulated quick connections are made for protection with an open-top design for ease of use for fast and nearly effortless installation.

SPECIFICATIONS	WF-8855E
Power Input	950W
Input Voltage	190-260 VAC, 50 / 60Hz
Output Current	55A
Converter Type	3 Stage Converter Charger
Voltage Output	13.2 - 14.4 VDC
Normal mode	13.6 VDC
Trickle charge mode	13.2 VDC
Bulk charge mode	14.4 VDC
Outer Dimensions	5 7/8"W x 4"H x 9 5/8"D
Weight	5.25 lbs.

Certifications: UL* and cUL* listed and FCC Class B compliant. Specifications are subject to change without notice or obligation.

ALL MODELS:
Standard Safety Features/Protections:
Over Current, Over Temperature, Over Voltage, Reverse Polarity
Case Material: Metal
Colors: Gray



THE HEARTBEAT OF TODAY'S RVS

The RV Industry's Electrical Authority

Our Power Pros provide expert technical support for everything the RV industry needs.



EXPERT PRODUCT SUPPORT

Shop for quality WFCO products on our website.

Learn more about RV electrical and lighting we have.